

## LPC-480G4FS - FANLESS MINI PC WITH MULTI GIGABIT LAN (DISCONTINUED)



### *Fanless Mini PC for a wide range of applications*

- No noise and low power consumption
  - 4 Gigabit Ethernet LAN/WAN ports
- Powerful Celeron Dual-Core 1020E Processor
  - Rugged Chassis w/ optional mounting
- 10-26 VDC Operation, ideal for mobile/field
- Built-in 4 Gigabit LAN, 4 USB 3.0, Audio, Serial, Video
  - Slim Slot Loading Optical Drives
- Solid State Hard Drives (SSD) Standard
  - Windows 10, 8.1 & 7 Compatible
- See our FAQ - Why Choose Fanless?


**The LPC-480G4FS is now end of life. The new functional equivalent model the LPC-490F can be found here.**




## GALLERY IMAGES



LPC-480G4FS Front View

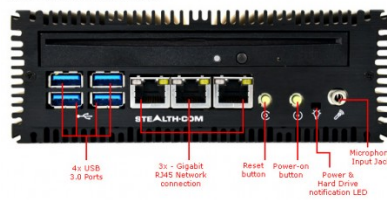

LPC-480G4FS Rear View

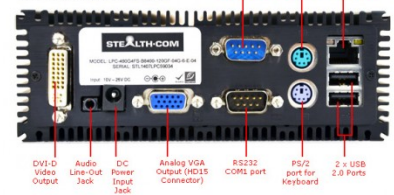

## PRODUCT DESCRIPTION

Fanless by design! The Stealth Computer model LPC-480G4FS is a highly reliable, fanless, energy efficient, rugged mini PC and features a total of four (4) GB Ethernet ports, (3-Front & 1-Rear) ideal for a myriad of applications such as security, VPN, network appliance, bandwidth controller, network diagnostics and mini servers to name a few.

Stealth's LPC-480G4FS is a small sized computer that operates without noisy cooling fans that can therefore draw in dirt and dust causing catastrophic failures. Stealth's fanless computers are encapsulated in a rugged extruded aluminum chassis that performs as a heat sink to dissipate internal heat build-up.

The Stealth LPC-480G4FS Little PC is packed with features including a front loading optical drive, 4 USB 3.0, 2 RS232/Serial, 4 Gigabit LAN ports, equipped with a 256GB SSD (Solid State Drive), up to 16GB of memory, Intel HD graphics, audio in/out and much more.

Stealth Fanless Mini PCs are an excellent choice for industrial and commercial applications which include, HMI, Embedded Control, IoT (Internet of Things), Digital Signs, process control, Interactive Kiosks, and Thin-Client applications.

## **ADDITIONAL INFORMATION**

<b>Processor</b>	Supporting Intel® Celeron Dual-Core 1020E (standard)
<b>Chipset</b>	Intel HM76 (Panther Point)
<b>Memory</b>	4GB DDR3 (standard), options of 8 and 16GB available
<b>Internal Storage</b>	128GB MLC SSD (Solid State Drive) standard (SATA) Options of up to 1TB SSD internal storage.
<b>Internal Expansion Option</b>	2 Internal Mini-PCle expansion options (1) full sized, (1 half size)
<b>Optical Drives</b>	Optional Slim Slot Loading DVD-RW / CD-RW (SATA) Optional DVD-RW / Blu-Ray Burner Serial ATA (SATA)
<b>Video</b>	Integrated Intel HD4000 graphics Dual Display support (clone or extended desktop) Includes VGA / HD-15 port and DVI-D (digital Only)
<b>Networking</b>	Integrated 10/100/1000 Base-T Intel Pro 1000 PL (82574L) Gigabit Ethernet controller, RJ45 connection (PXE support) Optional 802.11 b/g/n/ac Dual Band (2.4Ghz / 5Ghz) Wireless Networking and Bluetooth 4.0, Realtek® RTL8821AE via internal Mini-PCle
<b>Audio</b>	Integrated Realtek High Definition Audio CODEC ALC892
<b>Operating Systems</b>	Windows 7 (32 and 64-bit) Windows 10 (64-bit) Windows 8.1 (32 and 64-Bit) Windows 8 (32 and 64-Bit) Windows Server 2008 Windows Server 2012 R2 Ubuntu Linux Optional: QNX & embedded Please contact us directly for any special requirements
<b>Chassis Description</b>	Fanless Rugged Aluminum Chassis
<b>Power Input</b>	Rear DC power Jack ideal for mobile applications Includes External AC Adapter, Input 100~240V AC @ 1.5A 50-60Hz Input is 10V - 26VDC (84W MAX)

<b>Power Management</b>	ACPI 4.0a compliant and Operating System direct power management Wake-on event (Real Time Clock / RTC, USB Keyboard, LAN / Network, Keyboard, Mouse)
<b>Hardware Monitor</b>	Processor temperature Voltage 100-240V AC Adapter North American Power Cord
<b>Included with System</b>	4 Rubber Feet DVD Playback Software CD Burning Software * NOTE: Subject to change without notice
<b>Options</b>	Optional 802.11 b/g/n/ac Dual Band (2.4Ghz / 5Ghz) Wireless Networking and Bluetooth, Intel® AC7260 via internal Mini-PCIe Remote power option Ideal for OEM or Cabinet manufacturers Solid State Drives (SSD) SATA Wall Mount Bracket 2 PS/2 ports for Keyboard & Mouse 2 x RS232 COM port 1x Gigabit RJ45 Network connection Audio Line-Out Jack 2 x USB 2.0 Ports 1x Analog VGA / HD-15 1x DVI-D video connector DC Power Input Jack 4 x USB 3.0 Ports * 3 x 10/100/1000 RJ45 Network connections Headphone output Jack Microphone Input Jack
<b>Rear Panel</b>	Power and Hard Drive notification LED Power-on button Reset button * Note: The Intel® USB 3.0 eXtensible Host Controller Driver is not supported on Windows XP and Windows Vista, USB 2.0 speeds will be used
<b>Front Panel</b>	
<b>Dimensions</b>	6.1"(W) x 10.0"(D) x 2.17"(H) (159 x 250 x 55 mm) Operating Temperature: 0 - 45C (32 to 113 F) Storage Temperature: -20 to 60C
<b>Environmental</b>	Relative Humidity: 5% ~ 90%, non-condensing (Operating & Non-Operating)

**Approvals**

RoHS

**Weight**

Shipping Weight: 6.5 Lbs / 2.9 KG (Depending on configuration)

Unit Weight: 3.45 lbs / 1.56 KG (Depending on configuration)

Power supply Weight: 1.35 lbs / 0.62 KG

**Warranty**

1 Year limited Warranty Standard

1 Year Extended Warranty available (see Configurator/Price List)

**Disclaimer**

Note: Specifications are subject to change without notice.