

## LPC-815 - ULTRA SMALL RUGGED FANLESS, MINI PC (WIDE RANGE TEMPERATURE)




**\$1,145.00 USD**

### ***Rugged Fanless Small Form Factor PC***

- Rugged Fanless Design for Wide Range Temperature Operation (-25 to +70 Deg. C)
  - Powerful Intel Celeron Mobile Processor
    - 4x DIO (Digital input/output) ports
  - Wide Range 9-48 VDC Input, ideal for mobile/field
- Built-in Gigabit LAN, USB 3.0/2.0, Audio, Serial, Video (DVI-I & Displayport)
  - Solid State Drives (SSD) Standard
    - Windows 7, 8.1, 10 and Linux
      - CE, FCC & RoHS
  - See our FAQ – Why Choose Fanless?



## GALLERY IMAGES

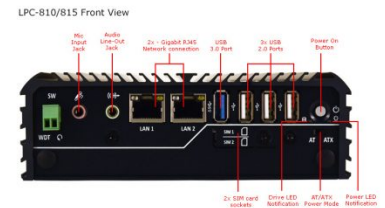

## PRODUCT DESCRIPTION

The Stealth LPC-815 is the smallest mini PC in Stealth's LPC-800 series line-up, weighing in at just 1.9 pounds (0.86kg), and can fit in the palm of your hand measuring just 5.9"(W) x 4.13"(D) x 1.9"(H) (150mm x 105mm x 49mm) in size. Designed for wide range temperature operation (-25 to +70 Deg. C) the LPC-815 Fanless Mini PC is an excellent choice for industrial and commercial applications

The fanless small form factor PC is RoHS, CE and FCC approved, and comes standard with Intel® Celeron® Processor J1900, Quad Core mobile processor and features four DIO (Digital input/output) ports. The 4 DIO ports with Isolation are ideal for reacting to motion sensors, or machinery status indicators, by ensuring signal integrity, especially in dusty, moist, and vibration prone industrial environments.

Fanless by design the LPC-815 makes it possible to employ the rugged mini PC for applications in challenging industrial environments. The aluminum chassis that houses the system of the LPC-810 model is heat-dispersing and impact resistant. The small fanless computer comes standard with a wide range 9-48 VDC input, ideal for mobile/field use, supported by built-in Gigabit LAN, USB 3.0/2.0, Audio, Serial, Video (DVI-I & Display) ports.

The LPC-800 series is fully customizable to your exact specifications, and designed for use in a multitude of applications including: Audio/Video Recording, Embedded Control, Digital Signs, Interactive Kiosks, Thin-Clients, and Human/Machine Interface.

## ADDITIONAL INFORMATION

<b>Processor</b>	Supporting Intel® Celeron® Processor J1900, Quad Core, 2MB Cache, up to 2.42 GHz (standard)
<b>BIOS</b>	AMI 64Mbit SPI BIOS
<b>Chipset</b>	SoC integrated
<b>Memory</b>	4GB DDR3 SO-Dimm RAM (standard), option of 8GB available
<b>Internal Storage</b>	128GB MLC SSD (Solid State Drive) standard (SATA) Wide Temperature Options of up to 1TB SSD (Wide Temperature) internal storage.
<b>Internal Expansion Option</b>	2 Internal full sized Mini-PCIe expansion slots
<b>Video</b>	Integrated Intel HD Graphics Dual Display support with DisplayPort and DVI-I 2 onboard Gigabit Ethernet controllers, RJ-45 interface, PXE and WOL Supported
<b>Networking</b>	LAN1 & LAN2: Intel I210-AT Optional 802.11 b/g/n/ac Dual Band (2.4Ghz / 5Ghz) Wireless Networking and Bluetooth 4.0, Realtek® RTL8821AE via internal Mini-PCIe
<b>Communications</b>	2x External SIM card sockets for wireless connectivity
<b>Audio</b>	Integrated Realtek High Definition Audio CODEC ALC888S
<b>Operating Systems</b>	Windows Server 2019 Windows 7 (32 and 64-bit) Windows 10 (64-bit) Windows 8.1 (32 and 64-Bit) Ubuntu Linux Please contact us directly for any special requirements
<b>TPM Module</b>	TPM 2.0 (Trusted Platform Module), provides increased hardware security.
<b>WatchDog Timer</b>	1 ~ 255 sec/min System Reset
<b>Hardware Monitor</b>	Processor temperature Voltage

<b>Chassis Description</b>	Fanless Rugged Aluminum Chassis
<b>Power Input</b>	Input is 9V – 48V DC Power Mode: AT & ATX Rear Locking 3-Pin power Jack ideal for mobile applications Includes External AC Adapter, Input 100~240V AC @ 1.4A 50-60Hz Power Protection: OVP (Over Voltage Protection), OCP (Over Current Protection) & Reverse Protection North American Power Cord Wall Mount Bracket * NOTE: Subject to change without notice 100-240V AC Adapter, 4.75ft cable exit length
<b>Included with System</b>	DIN Rail Mount
<b>Options</b>	Optional 802.11 b/g/n/ac Dual Band (2.4Ghz / 5Ghz) Wireless Networking and Bluetooth, Intel® AC7260 via internal Mini-PCle Remote power option Ideal for OEM or Cabinet manufacturers External USB DVD+-RW/CD-RW Drive 2 x RS232 COM port 4x DIO (Digital input/output) with Isolation
<b>Rear Panel</b>	1x DVI-I video connector 1x DisplayPort video connector 9 – 48V DC Connector 2 x 10/100/1000 RJ45 Network connections 3 x USB 2.0 Ports 1 x USB 3.0 Port
<b>Front Panel</b>	Audio Line-Out Jack Microphone Input Jack AT / ATX Switch Power-on button
<b>Dimensions</b>	5.9"(W) x 4.13"(D) x 1.9"(H) (150mm x 105mm x 49mm) Operating Temperature: -25 to 70C (-13 to 158 F) Relative Humidity: 10% ~ 95%, non-condensing (Operating & Non-Operating)
<b>Environmental</b>	Shock: 50G, half sine, 11ms (with SSD) Vibration: 5 Grms, 5 – 500 Hz, 0.5 hr/axis (with SSD) Vibration: 1 Grms, 5 – 500 Hz, 0.5 hr/axis (with HDD)
<b>Approvals</b>	RoHS CE FCC
<b>Weight</b>	Unit Weight: 1.9 lbs / 0.86 KG

## **Warranty**

2 Year limited Warranty, Standard

1 Year Extended Warranty available (see Configurator/Price List)

## **Disclaimer**

Note: Specifications are subject to change without notice.