

19" PANEL MOUNT LCD MONITOR (QUICKSHIP)




\$1,925.00 USD

Model: SV-1905-PM

- 19" Industrial Grade Panel Mount LCD Display
- Meets NEMA 4 / IP65 Environmentally Sealed
 - Resistive Touch Screen Standard
- Wide DC Input (9-36V DC) / with Mounted AC Adapter
 - Wide operating temperature (-10C - +60C)
 - 350 Nits of Brightness, Adjustable Controls
- VGA / HD15, DVI-D, and HDMI video connectors
 - 3 Year Warranty



GALLERY IMAGES

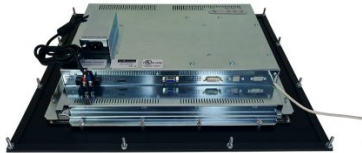

PRODUCT DESCRIPTION

Stealth builds high quality LCD monitors suited for industrial and commercial applications. Our 19" Panel Mount LCD Monitor comes equipped with an environmentally sealed front panel that is resistant to splashes or hose downs. All Stealth Panel Mount LCD products are easily installed by securing the rear studs into your console, panel or wall.

Our LCDs are available with various Touch Screen options including Resistive or Capacitive. For non-touch applications our anti-glare protective glass overlay is installed for maximum protection.

Prior to shipping, each and every display is put through Stealth's rigorous QA burn-in procedure that is documented and controlled through our ISO 9001 quality system.

We offer Panel mount, Rack mount and Open Frame designs as standard off-the-shelf products in 8.4" up to 24" diagonal sizes. Stealth's LCD products are environmentally sealed to NEMA 4 / IP65 and are ideal for applications where dirt, dust, moisture and water are present. Stealth's rugged LCD products are constructed from solid steel and stainless steel for corrosion resistance applications.

ADDITIONAL INFORMATION

Bezel Type	Panel Mount
Screen Size	19.0" (Diagonal)
Aspect Ratio	5:4
Native Resolution	1280 x 1024 (Auto sync from 640 x 480 to 1280 x 1024)
Pixel Pitch	0.294mm x 0.294mm
Response Time	10ms (Typical, On/Off)
Type	TFT Active Matrix Liquid Crystal
Video Input Connectors	VGA / HD-15 DVI Compliant Digital HDCP (DVI-D) HDMI
Viewing Angle	170° / 160° (H / V) - (Viewing angle of LCD panel without touch)
Contrast Ratio	1000:1 (typical)
Luminance (Brightness)	350 cd/m2 typical at center (350 Nits)
Viewable Image Size	Horizontal: 14.81" / 376.32 mm, Vertical: 11.85" / 301.06 mm
Input	DC Input: 9V - 36V DC AC Adapter is Removable AC Input: 100-240V, 50-60Hz, 1.5A
Control Buttons (Rear mounted)	Power, Left, Right, Menu
Controls On-Screen Display	Brightness, Contrast, Input Source, Color, Image Adjust, OSD Lockout
Environmental Rating	Standard Bezel: NEMA 4 / IP65 Front Panel (when properly installed) protection against windblown dust and rain, splashing water, and hose-directed water Optional Stainless Steel Bezel: NEMA 4X / IP65 Front Panel (when properly installed) corrosion protection, protection against windblown dust and rain, splashing water, and hose-directed water

Environmental

Operating Temperature: -10C - +60C (14F - 140F)

Storage Temperature: -30C - +85C (-22F - +185F)

Operating: Relative Humidity 20% ~ 80%

Storage Relative Humidity: 20% ~ 80%

Panel Finish

Black Baked Enamel (Standard)

Stainless Steel - Brushed #304 (Optional)

Unit Weight

Unit Weight: 17.3 Lbs (7.86 Kg)*

Shipping Weight: 23.85 Lbs (10.82 Kg)*

* Weight may vary depending on configuration

Dimensions

Panel Mount: 21.0"(W) x 17.5"(H) x 2.56"(D) 533.4mm x 444.5mm x 65mm

Available Models

SV-1905-PM-RT - Resistive Touch (Serial/DB9 and USB)

Warranty

3 Year Parts and Labor

Disclaimer

Note: Specifications are subject to change without notice.