

## SR-2860 - POWERFUL FANLESS 2U RACKMOUNT SERVER/PC



**\$2,160.00 USD**

### ***Powerful & Versatile Fanless Rack PC***

- Fanless, Noise Free Computing
- Space Saving 2U, 3.5" Rack Server/PC
- Powerful Intel's® 6th and 7th generation Core™ i5 & i7 mobile processors
  - 8x DIO (Digital input/output) ports
  - Dual Removable Front Drives
- Wide Range 9-48 VDC Input, ideal for mobile/field
- Built-in Gigabit LAN, USB 3.0/2.0, Audio, Serial, Video (DVI-I & Displayport)
  - 4K Resolution, Ultra HD, Triple Display support
  - Solid State Drives (SSD) Standard
  - Windows 7, 8.1, 10 and Linux
  - See our FAQ - Why Choose Fanless?
- Small Form Factor model version also available






## GALLERY IMAGES



SR-2860 Front View

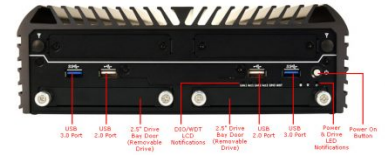

## PRODUCT DESCRIPTION

The Stealth model SR-2860 is a powerful fanless 2U Rackmount Server/PC that is easily integrated into standard 19" rack cabinets or used as standalone workstations.

The SR-2860 is designed for high performance is well equipped with Intel's® 6th and 7th generation Core™ i5 & i7 mobile processors, supporting up to 32GB of DDR4 RAM and capacity of up to 8TB in solid state drives(SSD) when equipped with 4 internal drives.

This SR-2860 rack mount computer includes, two Removable Front Drive Bays, providing easy drive swapping and optional RAID configurations. The powerful small form factor pc also includes an abundance of I/O ports such as USB 3.0/2.0 ports, RS232 COM ports, Gigabit networking, external SIM card sockets for wireless connectivity and audio/video ports.

Stealth's SR-2860 rack pc is designed to handle 4K Ultra HD Resolution video and can support up to three connected displays via DisplayPort and DVI-I video ports. The SR-2860 also features 8x DIO (Digital input/output) with Isolation, offering the advantage of providing electrical isolation of digital signals.

Stealth developed the SR-2860 to be more than just your average server, it engineered to be extremely mobile application friendly with the inclusion of Wide Range 9-48 VDC power input and to protect the system the power is regulated with OVP (Over Voltage Protection), OCP (Over Current Protection) & Reverse Protection.

The SR-2860 is designed for use in a multitude of applications including; Audio/Video recording, Embedded Control, Digital Signs, Interactive Kiosks, Thin-Clients, and Human/Machine Interface.

## ADDITIONAL INFORMATION

<b>Processor</b>	Intel® Core™ i7-7700T (4 Cores / 8 Threads, up to 3.80Ghz) Supporting Intel® 6th Gen Core™ Processor i5-6500TE, Quad Core, 6MB Cache, up to 3.3 GHz (standard) Optional Intel® 6th Gen Core™ Processor i7-6700TE , Quad Core, 8MB Cache, up to 3.4 GHz
<b>BIOS</b>	AMI 128Mbit SPI BIOS
<b>Chipset</b>	Intel® Q170 Express Chipset
<b>Memory</b>	2x DDR4 Memory Sockets Supporting up to 32GB of RAM / Memory
<b>Internal Storage</b>	256GB 3D NAND SSD (Solid State Drive) standard (SATA) Options of up to 1TB SSD internal storage. Optional Onboard RAID configurations (0, 1, 5, 10), requires multiple drives
<b>Internal Expansion Option</b>	4 Internal full sized Mini-PCIe expansion slots
<b>Video</b>	Integrated Intel HD Graphics 530 Includes DVI-I & 2x DisplayPort video ports Supports 4K Ultra HD Resolution as well as 1080p HD Video Triple Display support with DisplayPort and DVI-I Max Resolution, DisplayPort Mode: 4096×2304 @ 60Hz, DVI Mode: 1920 x 1200 @ 60Hz
<b>Networking</b>	2 onboard Gigabit Ethernet controllers, RJ-45 interface, PXE and WOL Supported LAN1: Intel I210-AT, LAN2: Intel I219LM Optional 4 x 10/100/1000 RJ45 POE Network connections on Front Panel Optional 802.11 b/g/n/ac Dual Band (2.4Ghz / 5Ghz) Wireless Networking and Bluetooth 4.0, Realtek® RTL8821AE via internal Mini-PCIe
<b>Communications</b>	2x External SIM card sockets for wireless connectivity
<b>Audio</b>	Integrated Realtek High Definition Audio CODEC ALC888S

<b>Operating Systems</b>	Windows Server 2019 Windows 7 (32 and 64-bit) Windows 10 (64-bit) Windows 8.1 (32 and 64-Bit) Ubuntu Linux Please contact us directly for any special requirements
<b>TPM Module</b>	TPM 2.0 (Trusted Platform Module), provides increased hardware security.
<b>WatchDog Timer</b>	1 ~ 255 sec/min System Reset
<b>Hardware Monitor</b>	Processor temperature Voltage
<b>Chassis Description</b>	2U, 3.5" High, 19" EIA rackmount Solid Steel Chassis, Black Color Locking / Latching Secure Front door Fanless Rugged Aluminum Chassis
<b>Power Input</b>	Input is 9V - 48V DC Power Mode: AT & ATX Rear Locking 3-Pin power Jack ideal for mobile applications Includes External AC Adapter, Input 100~240V AC @ 1.4A 50-60Hz Power Protection: OVP (Over Voltage Protection), OCP (Over Current Protection) & Reverse Protection
<b>Included with System</b>	North American Power Cord * NOTE: Subject to change without notice 100-240V AC Adapter, 4.75ft cable exit length
<b>Options</b>	Optional 802.11 b/g/n/ac Dual Band (2.4Ghz / 5Ghz) Wireless Networking and Bluetooth, Intel® AC7260 via internal Mini-PCle Remote power option Ideal for OEM or Cabinet manufacturers External USB DVD+-RW/CD-RW Drive
<b>Rear Panel</b>	2 x RS232 COM port 2x Gigabit RJ45 Network connection 8x DIO (Digital input/output) with Isolation Audio Line-Out Jack Microphone Input Jack 4 x USB 3.0 Ports 1x DVI-I video connector 2x DisplayPort video connectors 9 - 48V DC Connector

## Front Panel

2 x USB 3.0 Port  
2 x USB 2.0 Ports  
AT / ATX Switch  
Power-on button

## Dimensions

19.0"(W) x 13.94"(D) x 3.468"(H) (482.6 x 354 x 88 mm)

## Environmental

Operating Temperature: 0 - 40C (32 to 104 F)  
Relative Humidity: 10% ~ 95%, non-condensing (Operating & Non-Operating)  
Shock: 50G, half sine, 11ms (with SSD)  
Vibration: 5 Grms, 5 - 500 Hz, 0.5 hr/axis (with SSD)  
Vibration: 1 Grms, 5 - 500 Hz, 0.5 hr/axis (with HDD)

## Approvals

RoHS

## Weight

Unit Weight: 8.0 lbs / 3.62 KG (Depending on configuration)

## Warranty

2 Year limited Warranty, Standard  
1 Year Extended Warranty available (see Configurator/Price List)

## Disclaimer

Note: Specifications are subject to change without notice.