

## 102-DP-FSR-BL - RUGGED ILLUMINATED KEYBOARD




**\$500.00 USD**

### ***Illuminated/Backlit industrial keyboard with Built-in Mouse***

- Environmentally Sealed to NEMA 4, 4X / IP65 specifications
  - Backlighting / Illumination
  - ABS-Polycarbonate Sealed Plastic Case
  - 102 Keys, 12 Function Keys
  - Built-in Finger Tip Mouse (Pointing Device)
  - Greater than 10 Million cycles expected life
    - PS/2 or USB connectors
- Optional "Mobile" enclosure w/ bottom mounting studs



## GALLERY IMAGES

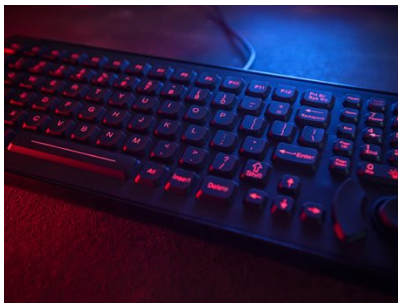

## PRODUCT DESCRIPTION

The Stealth Computer model 102-DP-FSR-BL is an excellent solution for space saving needs. An ultra-thin and compact unit, it measures only 1.05 inches in height, while featuring an integrated 3 button Finger Tip Mouse pointing device, eliminating the need for an external mouse. For working in low-light situations, the 102-DP-FSR-BL keyboard even comes with backlit keys.

The environmentally sealed (NEMA & IP rated) enclosure is intended for indoor or outdoor use primarily to provide a degree of protection against corrosion, windblown dust and rain, splashing water, and hose-directed water; and to be undamaged by the formation of ice on the enclosure.

Stealth's industrial keyboards and pointing devices are also available in stainless steel, desktop, panel mount, rack mount, open-frame, kiosk/public access and with illuminated / backlit features.

## ADDITIONAL INFORMATION

<b>Industrial Approvals</b>	NEMA 4, 4X / IP65 UL 60950, CE, FCC Class B
<b>Key Switch</b>	Material: Industrial Silicone Rubber Life: Greater than 10 million cycles Travel: 0.055" (1.4mm) Actuation Force: 200g (+/- 30g) / 7.05oz (+/- 1.06oz) Feedback: Tactile with mechanical snap
<b>Power</b>	PS/2 Keyboard: 210 mA @ 5V (from Keyboard Port) PS/2 Mouse: 35mA @ 5V (from Mouse Port) USB: 245 mA @ 5V (from USB port)
<b>Temperature Range</b>	Operating: -40C to +70C (-40F to +158F) Storage: -40C to +90C (-40F to +194F)
<b>Humidity</b>	100% Humidity Resistant
<b>Shock</b>	3x11 ms pulses of 50g on each of 3 axes
<b>Vibration</b>	Power Spectral Density: 0.04g/Hz, Frequency Range: 20Hz-2kHz, Duration of Test per Axis: 3 hours
<b>Backlighting / Illumination</b>	Red LEDs (On/Off)
<b>Dimensions</b>	Mobile Version: 14.74" (w) x 5.69" (h) x 1.64" (d) (374.4mm x 144.5mm x 41.7mm) Standard Version: 14.6" (w) x 5.55" (h) x 1.05" (d) (370.84mm x 140.97mm x 26.67mm)
<b>Cable</b>	Design: 10 Feet (3.05 meters) Single 10' "Y-Split" Cable with PS/2 Connectors, or Single USB Cable
<b>Compatibility</b>	PS/2: All windows operating systems most Linux/Unix Systems, USB: All windows operating systems, MAC OS and most Linux/Unix Systems
<b>Additional Options</b>	Custom cable lengths, special connectors, custom enclosures etc Other Languages Available - Contact us for more details, Minimum quantities may apply.
<b>Warranty</b>	1 Year limited Warranty Standard

## **Model Numbers**

102-DP-FSR-BL-M-PS/2-RED – Mobile Version, PS/2 Interface  
102-DP-FSR-BL-M-USB-RED – Mobile Version, USB Interface  
102-DP-FSR-BL-PS/2-RED – Standard Version, PS/2 Interface  
102-DP-FSR-BL-USB-RED – Standard Version, USB Interface

## **Disclaimer**

Note: Specifications are subject to change without notice.