

24" PANEL MOUNT LCD MONITOR (SV-2410W-PM)




\$1,950.00 USD

Model: SV-2410W-PM

- Panel Mount 24" Widescreen LCD Monitor
- NEMA 4/4X / IP66 Environmentally Sealed
- Resistive Touch Screen Standard (Optional Capacitive)
 - 16:10 Aspect Ratio
 - 1920 x 1200 Maximum Resolution
- 300 Nits of Brightness, Adjustable Controls
- VGA, DVI-D, Displayport & HDMI connectors
 - Wide Viewing Angles, 178°
- Stainless Steel & Custom painted bezel options
 - cULus Listed
 - 3 Year Warranty



GALLERY IMAGES

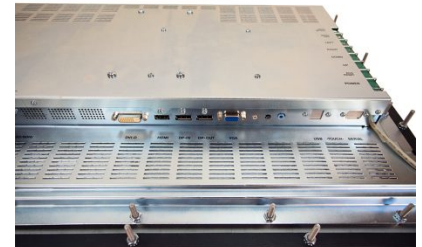

PRODUCT DESCRIPTION

Stealth's 24" Panel Mount LCD monitor features a widescreen 16:10 high resolution display that easily integrates into your enclosure, cabinet, console, wall, kiosks or other industrial applications. Mounting the display is accomplished by simply securing the rear metal studs into your application cutout.

Stealth's 24" Panel Mount Display comes standard with an environmentally sealed NEMA 4, 4X / IP66 front panel that is resistant to dust/dirt penetration or even liquid splashes. The rugged SV-2410W-PM LCD is available with a capacitive or a resistive touchscreen.



Prior to shipping, each and every display is put through Stealth's rigorous QA burn-in procedure that is documented and controlled through our ISO 9001 quality system and in compliance with being cULus Listed, UL 60950-1 & CAN/CSA C22.2 No. 60950-1-07.

Stealth offers a wide range of LCD product offerings that include Panel mount, Rack mount and Open Frame designs as standard off-the-shelf products in 8.4" up to 24" diagonal sizes. Our Rugged LCD products are constructed from solid steel and will meet the demands of your application without breaking your budget.

ADDITIONAL INFORMATION

Bezel Type	Panel Mount
Screen Size	24.0" (Diagonal)
Aspect Ratio	16:10
Native Resolution	1920 x 1200 (Auto sync from 640 x 480 to 1920 x 1200)
Horizontal Frequency	31.5KHz - 95KHz
Vertical Frequency	56 Hz ~ 75 Hz
Pixel Pitch	0.27mm x 0.27mm
Response Time	5ms Typical
Type	IPS LCD Panel c/w LED Backlighting
Video Input Connectors	VGA / HD-15 DVI Compliant Digital HDCP (DVI-D) HDMI Displayport DisplayPort Multi-Stream Transport (MST) port (Clone or Extended Desktop)
Viewing Angle	178° / 178° (H / V) - (Viewing angle of LCD panel sans touch)
Contrast Ratio	1000:1 (typical)
Luminance (Brightness)	300 cd/m2 typical at center (300 Nits)
Viewable Image Size	Horizontal: 20.41" (518.4mm) Vertical: 12.76" (324.0mm)
Video Signal	ANALOG: 0.7 Vp-p/75 Ohms
Sync Signal	Separate Sync Sync on Green Composite Sync
Input	AC Input: 120 - 240VAC ~ 60/50 Hz Power Consumption: 29 W (typical)
Control Buttons (Rear mounted)	Left (-), Right (+), Up, Down, Auto Adjustment, Brightness Hot key, OK, Power ON/OFF

Controls On-Screen Display	Brightness, Contrast, Auto Adjust, Image Position, Image Adjust, Color Adjust, Display Mode, Language Select, OSM Lockout, OSM Time-out
Environmental Rating	Standard Bezel: NEMA 4/4X / IP66 Front Panel (when properly installed) protection against windblown dust and rain, splashing water, and hose-directed water
Environmental	Operating Altitude: 0 - 16,404 feet (0 - 5000m) Operating Humidity: 20% - 80% Operating Temperature: 5C - 35C (41F - 95F) Storage Altitude: 0 - 40,000 Feet (0 - 12,192m) Storage Humidity: 10% - 85% Storage Temperature: -10C - 60C (14F - 140F)
Panel Finish	Black Baked Enamel (Standard) Stainless Steel - Brushed #304 (Optional)
Unit Weight	20 Pounds (9.07Kg)
Dimensions	Panel Mount: 24.5"(W) x 16.75"(H) x 2.8"(D) 622.3mm x 425.5mm x 71.1mm SV-2410W-PM-CT-DB9 - Capacitive (Serial / DB9) SV-2410W-PM-CT-SS-DB9 - Capacitive Stainless Steel (Serial / DB9) SV-2410W-PM-CT-SS-USB - Capacitive Stainless Steel (USB) SV-2410W-PM-CT-USB - Capacitive (USB) SV-2410W-PM-RT - Resistive (USB and Serial / DB9) SV-2410W-PM-RT-SS - Resistive Stainless Steel (USB and Serial / DB9)
Available Models	
Warranty	3 Year Parts and Labor
Disclaimer	Note: Specifications are subject to change without notice.