

Certificate

Issue Date: February 2, 2021
Ref. Report No. ISL-21LE080CE-MA

Product Name : Little PC
Model(s) : LPC-49xxxx ("x" can be 0-9, A-Z or blank for marketing purpose)
Responsible Party : Stealth
Address : 1 - 7550 Highway 27, Woodbridge,
Ontario, L4H 0S2, Canada

We, **International Standards Laboratory Corp.**, hereby certify that:

The sample ISL received which bearing the trade name and model specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in European Council Directive EMC Directive 2014/30/EU. And Our laboratories is the accredited laboratories and are approved according to ISO/IEC 17025. The device was passed the test performed according to :



Standards:

EN 55032:2015+AC:2016, CISPR 32:2015+COR1:2016: Class A
AS/NZS CISPR 32:2015: Class A
EN 61000-3-2:2014 and IEC 61000-3-2:2014
EN 61000-3-3:2013 and IEC 61000-3-3:2013
EN 55024:2010+A1:2015 and CISPR 24:2010+A1:2015
EN 61000-4-2:2009 and IEC 61000-4-2:2008
EN 61000-4-3:2006+A1:2008 +A2:2010 and IEC 61000-4-3:2006+A1:2007+A2:2010
EN 61000-4-4:2012 and IEC 61000-4-4:2012
EN 61000-4-5:2014+A1:2017 and IEC 61000-4-5:2014+A1:2017
EN 61000-4-6:2014+AC:2015 and IEC 61000-4-6:2013
EN 61000-4-8:2010 and IEC 61000-4-8:2009
EN 61000-4-11:2004+A1:2017 and IEC 61000-4-11:2004+A1:2017

I attest to the accuracy of data and all measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The determination of the test results is determined by customer agreement, regulations or standard document specifications.

The Laboratory evaluates measurement inaccuracies based on regulatory or standard document specifications and is listed in the report for reference. The quantitative project part judges the conformity of the test results based on the evaluation results of the standard cited uncertainty, and the qualitative project does not temporarily evaluate the measurement uncertainty.

Angus Chu

Angus Chu / Director

International Standards Laboratory Corp. LT Lab.

TEL: +886-3-263-8888 FAX: +886-3-263-8899

No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan

CE TEST REPORT

of
EN 55032 / CISPR 32 / AS/NZS CISPR 32
Class A
EN 55024 / CISPR 24 / IMMUNITY
EN 61000-3-2 / EN 61000-3-3

Product : **Little PC**
Model(s): **LPC-49xxxx** (“x” can be 0-9, A-Z or blank for marketing purpose)

Applicant: **Stealth**
Address: **1 – 7550 Highway 27, Woodbridge,
Ontario, L4H 0S2, Canada**

Test Performed by:



International Standards Laboratory Corp. LT Lab.

TEL: +886-3-263-8888 FAX: +886-3-263-8899

No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist., Tao Yuan City 325, Taiwan

Report No.: **ISL-21LE080CE-MA**
Issue Date : **February 2, 2021**



Test results given in this report apply only to the specific sample(s) tested and are traceable to national or international standard through calibration of the equipment and evaluating measurement uncertainty herein. The uncertainty of the measurement does not include in consideration of the test result unless the customer required the determination of uncertainty via the agreement, regulation or standard document specification. This test report shall not be reproduced except in full, without the written approval of International Standards Laboratory Corp.

Contents of Report

1.	General.....	1
1.1	Certification of Accuracy of Test Data.....	1
1.2	Test Standards.....	2
1.3	Description of EUT	5
1.4	Description of Support Equipment	7
1.5	Software for Controlling Support Unit.....	8
1.6	I/O Cable Condition of EUT and Support Units	9
2.	Power Main Port Conducted Emissions	10
2.1	Test Setup and Procedure	10
2.2	Conduction Test Data: Configuration 1.....	12
2.3	Test Setup Photo.....	14
3.	Telecommunication Port Conducted Emissions	16
3.1	Test Setup and Procedure	16
3.2	Test Data: LAN1\100M.....	18
3.3	Test Data: LAN1\10M.....	19
3.4	Test Data: LAN1\1G.....	20
3.5	Test Data: LAN2\100M.....	21
3.6	Test Data: LAN2\10M.....	22
3.7	Test Data: LAN2\1G.....	23
3.8	Test Data: LAN3\100M.....	24
3.9	Test Data: LAN3\10M.....	25
3.10	Test Data: LAN3\1G.....	26
3.11	Test Data: LAN4\100M.....	27
3.12	Test Data: LAN4\10M.....	28
3.13	Test Data: LAN4\1G.....	29
3.14	Test Setup Photo	30
4.	Radiated Disturbance Emissions.....	31
4.1	Test Setup and Procedure	31
4.2	Limit	33
4.3	Radiation Test Data: Configuration 1.....	35
4.4	Test Setup Photo.....	39
5.	Voltage Disturbance Emissions at Antenna Terminals.....	41
5.1	Test Setup and Procedure	41
6.	Differential Voltage Emissions.....	43
6.1	Test Setup and Procedure	43
7.	Outdoor units of home satellite receiving systems	45
7.1	Test Setup and Procedure	45
8.	Electrostatic discharge (ESD) immunity.....	47
8.1	Test Specification and Setup	47
8.2	Test Data: Configuration	48
8.3	Test Point.....	50
8.4	Test Setup Photo.....	52
9.	Radio-Frequency, Electromagnetic Field immunity	53
9.1	Test Specification and Setup	53
9.2	Test Data: Configuration	54
9.3	Test Setup Photo.....	55
10.	Electrical Fast transients/burst immunity.....	56

10.1	Test Specification and Setup	56
10.2	Test Data: Configuration	58
10.3	Test Setup Photo	59
11.	Surge Immunity.....	60
11.1	Test Specification and Setup	60
11.2	Test Data: Configuration	61
11.3	Test Setup Photo	62
12.	Immunity to Conductive Disturbance	63
12.1	Test Specification and Setup	63
12.2	Test Data: Configuration	64
12.3	Test Setup Photo	65
13.	Power Frequency Magnetic Field immunity	66
13.1	Test Specification and Setup	66
13.2	Test Data: Configuration	67
13.3	Test Setup Photo	68
14.	Voltage Dips, Short Interruption and Voltage Variation immunity.....	69
14.1	Test Specification and Setup	69
14.2	Test Data: Configuration	70
14.3	Test Setup Photo	71
15.	Harmonics	72
15.1	Test Specification and Setup	72
16.	Voltage Fluctuations	74
16.1	Test Specification and Setup	74
16.2	Test Data: Configuration	75
16.3	Test Setup Photo	76
17.	Appendix.....	77
17.1	Appendix A: Test Equipment.....	77
17.2	Appendix B: Uncertainty of Measurement.....	80
17.3	Appendix C: Photographs of EUT	82

1. General

1.1 Certification of Accuracy of Test Data

Standards: Please refer to 1.2

Equipment Tested: Little PC

Model: LPC-49XXXX (“x” can be 0-9, A-Z or blank for marketing purpose)

Applicant: Stealth

Sample received Date: November 6, 2020

Final test Date: EMI: refer to the date of test data
EMS: January 19, 2021

Test Site: Chamber 02; Chamber 14; Conduction 04;

Test Distance: 10m; 3m (above1GHz) (EMI test)

Temperature: refer to each site test data

Humidity: refer to each site test data

Atmospheric Pressure: 86 kPa to 106 kPa

Input power: Conduction input power: AC 230 V / 50 Hz
Radiation input power: AC 230 V / 50 Hz
Immunity input power: AC 230 V / 50 Hz

Test Result: **PASS**

Report Engineer: Betty Huang

Test Engineer: Jovi Liu

Jovi Liu

Approved By: Benson Chen

Benson Chen / Associate Director

1.2 Test Standards

The tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory Corp. in accordance with the following

EN 55032:2015+AC:2016, CISPR 32:2015+COR1:2016: Class A: Electromagnetic compatibility of multimedia equipment - Emission requirements.

AS/NZS CISPR 32:2015: Class A: Electromagnetic compatibility of multimedia equipment- Emission requirements

Performed Item	Test Performed	Deviation	Result
Conducted emissions from the AC mains power ports	Yes	No	PASS
Telecommunication Port Conducted Emissions (asymmetric mode)	Yes	No	PASS
Radiated emissions at frequencies below 1 GHz	Yes	No	PASS
Radiated emissions at frequencies above 1 GHz	Yes	No	PASS
Radiated emissions from FM receivers	N/A	N/A	N/A
Voltage Disturbance Emissions at Antenna Terminals	N/A	N/A	N/A
Differential voltage emissions	N/A	N/A	N/A
Outdoor units of home satellite receiving systems	N/A	N/A	N/A

EN 55024:2010+A1:2015 and CISPR 24:2010+A1:2015: Information technology equipment-Immunity characteristics - Limits and methods of measurement.

Standard	Description	Results	Criteria
EN 61000-4-2:2009 IEC 61000-4-2:2008	Electrostatic Discharge	Pass	B
EN 61000-4-3:2006+A1:2008 +A2:2010 IEC 61000-4-3:2006+A1:2007+A2:2010	Radio-Frequency, Electromagnetic Field	Pass	A
EN 61000-4-4:2012 IEC 61000-4-4:2012	Electrical Fast Transient/Burst	Pass	B
EN 61000-4-5:2014+A1:2017 IEC 61000-4-5:2014+A1:2017	Surge	Pass	B
EN 61000-4-6:2014+AC:2015 IEC 61000-4-6:2013	Conductive Disturbance	Pass	A
EN 61000-4-8:2010 IEC 61000-4-8:2009	Power Frequency Magnetic Field	Pass	A
EN 61000-4-11:2004+A1:2017 IEC 61000-4-11:2004+A1:2017	Voltage Dips / Short Interruption and Voltage Variation		
	>95% in 0.5 period	Pass	B
	30% in 25 period	Pass	C
	>95% in 250 period	Pass	C

Standard	Description	Results
EN 61000-3-2:2014 IEC 61000-3-2:2014	Limits for harmonics current emissions	Pass
EN 61000-3-3:2013 IEC 61000-3-3:2013	Limits for voltage fluctuations and flicker in low-voltage supply systems.	Pass

1.2.1 Performance Criteria for Compliance: EN 55024

Performance criterion A

During and after the test the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a minimum performance level specified by the manufacturer when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.

Performance criterion B

After the test, the EUT shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the EUT is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test. If the minimum performance level (or the permissible performance loss) is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the EUT if used as intended.

Performance criterion C

During and after testing, a temporary loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls or cycling of the power to the EUT by the user in accordance with the manufacturer's instructions.

Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

1.3 Description of EUT

EUT

This report test data using the report number 21LE080CE

Description	Little PC
Condition	Pre-Production
Model	LPC-49xxxx("x" can be 0-9, A-Z or blank for marketing purpose)
Serial Number	N/A
Maximum resolution	1920*1080 @60Hz
Maximum Operating Frequency	2.4GHz

The devices can be installed inside the EUT are listed below:

Component	Vendor	Description
Motherboard	Stealth	L191
CPU	Intel	i7-8700T 2.4GHz
Memory	Micron	MTA16ATF2G64HZ-2G6E1
2.5" SATA SSD	WD	WDS120G2G0A-00JH30
ODD	Sony	CRX890S
Adapter (Dedicated peripheral)	FSP	FSP180-AAAN3

The I/O ports of EUT are listed below:

I/O Port Type	Quantity
DC Power Port	1
Audio Port	2
LAN Port (10Mbps/100Mbps/1Gbps)	4
USB 3.0 Port	6
COM Port	2
DVI Port	1
Display Port	1
PS/2 Keyboard Port	1
PS/2 Mouse Port	1

Test Configuration

Configuration	1
Motherboard	Stealth LI91
CPU	Intel i7-8700T 2.4GHz
Memory	Micron MTA16ATF2G64HZ-2G6E1*2
2.5" SATA SSD	WD WDS120G2G0A-00JH30
ODD	Sony CRX890S
Power Supply	FSP FSP180-AAAN3

EMI Noise Source:

Please refer to the technical documents.

EMI Solution:

N/A

1.4 Description of Support Equipment

For EMI test Support Unit: 1~7

For EMS test Support Unit: 2~8

No	Unit	Model Serial No.	Brand	Power Cord	FCC ID
1	AKiTiO Type-C HDD*6	SK2-U31AS-AKT S/N: N/A	AKiTiO	N/A	FCC DOC
2	PS/2 Keyboard	Y-S0002 S/N: N/A	Logitech	N/A	FCC DOC
3	PS/2 Mouse	M-SBM96B S/N: N/A	Logitech	N/A	FCC DOC
4	LCD Monitor*2	U2412M S/N: N/A	DELL	Non-shielded	FCC DOC
5	Speaker/ microphone *2	RC E160 S/N: N/A	HTC	N/A	FCC DOC
6	Modem*2	DM1414 S/N: N/A	Aceex	Non-shielded	FCC DOC
7	Personal Computer	RW7 S/N: N/A	Lenovo	Non-shielded, Detachable	FCC DOC
8	Traveling Disk*6	TS16GJF700 S/N: N/A	Transcend	N/A	FCC DOC

1.5 Software for Controlling Support Unit

Test programs exercising various part of EUT were used. The programs were executed as follows:

1. Send Color bar to the LCD Monitor.
2. Read and write data through EUT SSD.
3. Read and write AKiTiO Type-C HDD(EMI) / Traveling Disk(EMS) through EUT USB 3.0 port.
4. Send audio signal to the Speaker/microphone through EUT Audio Port.
5. Receive and transmit packet of EUT to Personal Computer through EUT LAN Port.
6. Repeat the above steps.

	Filename	Issued Date
EUT SSD	Intel EMC	09/04/2000
LCD Monitor	Windows Media Player	10/11/2016
AKiTiO Type-C HDD(EMI)	Intel EMC	09/04/2000
Traveling Disk(EMS)	Intel EMC	09/04/2000
LAN	ping.exe	
Speaker/microphone	Windows Media Player	10/11/2016
Modem	Intel EMC	09/04/2000


1.6 I/O Cable Condition of EUT and Support Units

Description	Path	Length	Shielding	Core	Remark
AC Power Cord	100V (~240V) to EUT ADAPTER	1.8m	No	No	
USB Cable*6	AKiTiO Type-C HDD(EMI) to EUT USB 3.0Port	1.27m	Yes	No	
USB Cable*6	Traveling Disk(EMS) to EUT USB 3.0Port	1.0m	Yes	No	
Keyboard Cable	PS/2 Keyboard to EUT PS/2 Keyboard Port	1.8m	Yes	No	
Mouse Cable	PS/2 Mouse to EUT PS/2 Mouse Port	1.8m	Yes	No	
Display Cable	LCD Monitor to EUT Display Port	1.8m	Yes	No	
DVI Cable	LCD Monitor to EUT DVI Port	1.8m	Yes	Yes	
Audio Cable*2	Speaker/microphone to EUT Audio Port	1.4m	No	No	
COM Cable*2	Modem to EUT COM Port	1.8m	Yes	No	
LAN Cable*4	Personal Computer LAN Port to EUT LAN Port	10m	No	No	Cat 5e

2. Power Main Port Conducted Emissions

2.1 Test Setup and Procedure

2.1.1 Test Setup

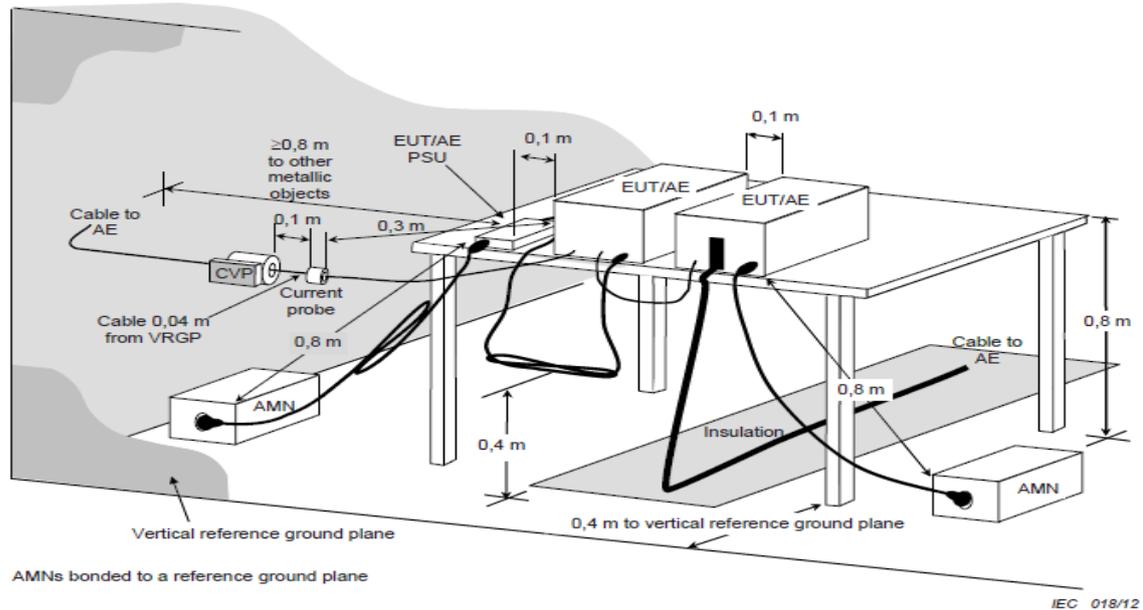

2.1.2 Test Procedure

The measurements are performed in a shielded room test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the standard. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

The interconnecting cables were arranged and moved to get the maximum measurement. Both the line of power cord, live and neutral, were measured. All of the interface cables were manipulated according to EN 55032 requirements.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

2.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range:	150kHz--30MHz
Detector Function:	Quasi-Peak / Average Mode
Resolution Bandwidth:	9kHz

2.1.4 Limit

Conducted emissions from the AC mains power ports of Class_A equipment:


Frequency	QP	AV
MHz	dB(μ V)	dB(μ V)
0.15-0.50	79	66
0.50-30	73	60
Note: The lower limit shall apply at the transition frequencies		

Conducted emissions from the AC mains power ports of Class_B equipment:

Frequency	QP	AV
MHz	dB(μ V)	dB(μ V)
0.15-0.50	66-56	56-46
0.50-5.0	56	46
5.0-30	60	50
Note: The lower limit shall apply at the transition frequencies		

2.2 Conduction Test Data: Configuration 1

-Live

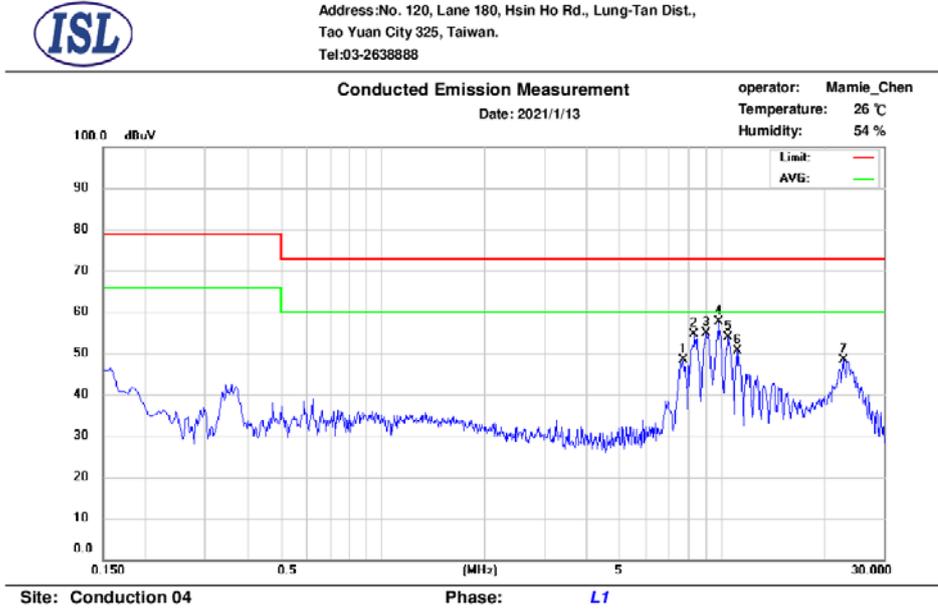

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	7.690	32.72	25.89	9.81	42.53	73.00	-30.47	35.70	60.00	-24.30
2	8.298	37.96	31.14	9.83	47.79	73.00	-25.21	40.97	60.00	-19.03
3	8.998	37.72	30.75	9.84	47.56	73.00	-25.44	40.59	60.00	-19.41
4	9.770	39.01	32.11	9.87	48.88	73.00	-24.12	41.98	60.00	-18.02
5	10.482	36.70	29.97	9.87	46.57	73.00	-26.43	39.84	60.00	-20.16
6	11.186	32.61	25.90	9.88	42.49	73.00	-30.51	35.78	60.00	-24.22
7	22.886	31.94	25.82	9.97	41.91	73.00	-31.09	35.79	60.00	-24.21

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor

Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit


The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

- Neutral



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

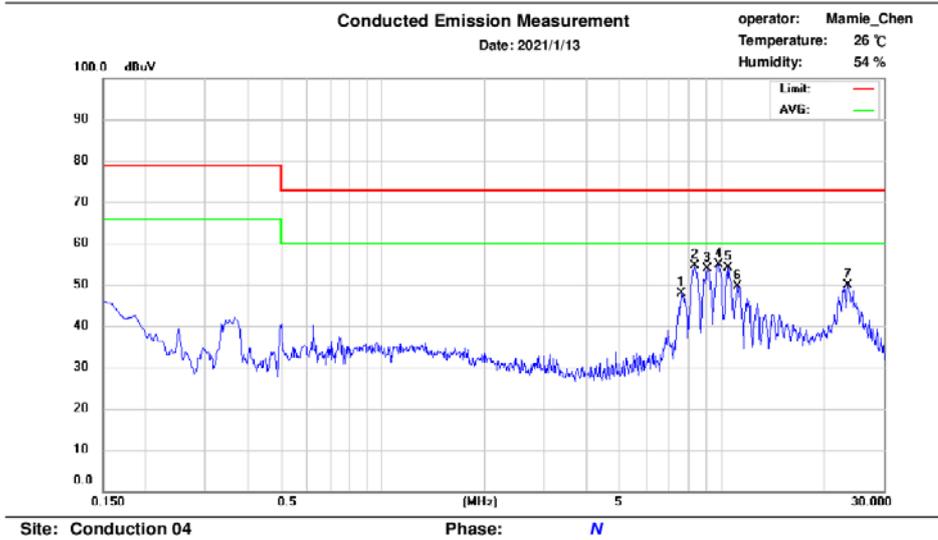

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	7.606	31.95	24.83	9.85	41.80	73.00	-31.20	34.68	60.00	-25.32
2	8.338	38.43	31.39	9.86	48.29	73.00	-24.71	41.25	60.00	-18.75
3	9.074	38.32	31.58	9.88	48.20	73.00	-24.80	41.46	60.00	-18.54
4	9.838	38.74	32.12	9.91	48.65	73.00	-24.35	42.03	60.00	-17.97
5	10.498	37.00	30.48	9.92	46.92	73.00	-26.08	40.40	60.00	-19.60
6	11.174	32.73	26.24	9.93	42.66	73.00	-30.34	36.17	60.00	-23.83
7	23.586	32.94	26.54	10.15	43.09	73.00	-29.91	36.69	60.00	-23.31

Note:

Margin = QP/AVG Emission - Limit

QP/AVG Emission = QP_R/AVG_R + Correct Factor

Correct Factor = LISN Loss + Cable Loss

A margin of -8dB means that the emission is 8dB below the limit

The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.

If peak data can pass, it will be shown in "QP/AVG Correct" column, if not, QP/AVG data will instead.

2.3 Test Setup Photo

Front View



Back View



3.1.4 Limit

Asymmetric mode conducted emissions from Class_A equipment:

Applicable to

1. wired network ports.
2. optical fibre ports with metallic shield or tension members.
3. antenna ports.

Frequency range MHz	Coupling device	Detector type / bandwidth	Class_A voltage limits dB(μV)	Class_A current limits dB(μA)
0.15-0.5	AAN	Quasi Peak / 9 kHz	97-87	n/a
0.5-30			87	
0.15-0.5	AAN	Average / 9 kHz	84-74	
0.5-30			74	
0.15-0.5	CVP and current probe	Quasi Peak / 9 kHz	97-87	53-43
0.5-30			87	43
0.15-0.5	CVP and current probe	Average / 9 kHz	84-74	40-30
0.5-30			74	30
0.15-0.5	Current Probe	Quasi Peak / 9 kHz	n/a	53-43
0.5-30				43
0.15-0.5	Current Probe	Average / 9 kHz		40-30
0.5-30				30


Asymmetric mode conducted emissions from Class_B equipment:

Applicable to:

1. wired network ports.
2. optical fibre ports with metallic shield or tension members.
3. broadcast receiver tuner ports.
4. antenna ports.

Frequency range MHz	Coupling device	Detector type / bandwidth	Class_B voltage limits dB(μV)	Class_B current limits dB(μA)
0.15-0.5	AAN	Quasi Peak / 9 kHz	84-74	n/a
0.5-30			74	
0.15-0.5	AAN	Average / 9 kHz	74-64	
0.5-30			64	
0.15-0.5	CVP and current probe	Quasi Peak / 9 kHz	84-74	40-30
0.5-30			74	30
0.15-0.5	CVP and current probe	Average / 9 kHz	74-64	30-20
0.5-30			64	20
0.15-0.5	Current Probe	Quasi Peak / 9 kHz	n/a	40-30
0.5-30				30
0.15-0.5	Current Probe	Average / 9 kHz		30-20
0.5-30				20

3.2 Test Data: LAN1\100M

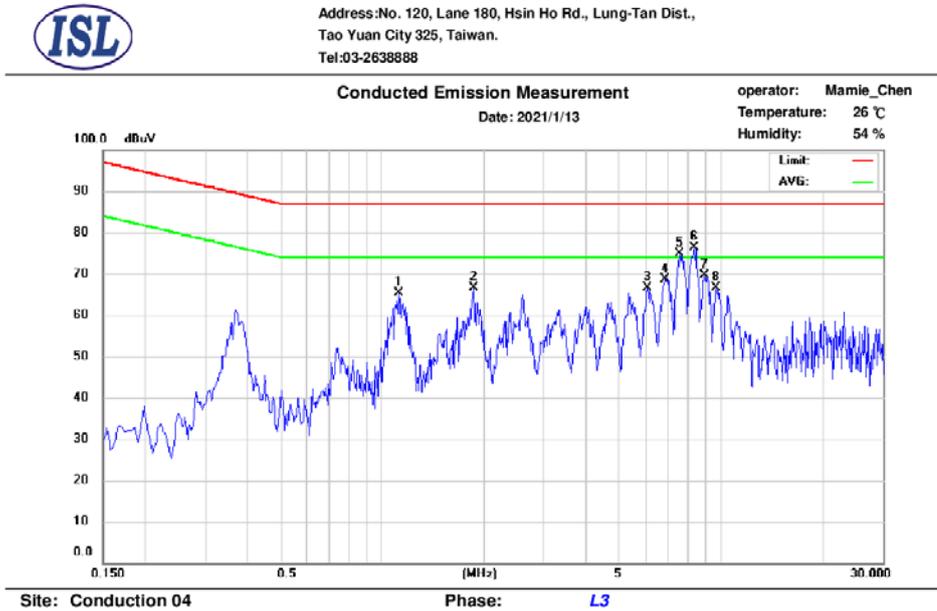


No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	1.118	50.29	39.92	9.60	59.89	87.00	-27.11	49.52	74.00	-24.48
2	1.862	49.09	39.15	9.59	58.68	87.00	-28.32	48.74	74.00	-25.26
3	6.082	48.73	40.61	9.60	58.33	87.00	-28.67	50.21	74.00	-23.79
4	6.838	52.60	45.10	9.61	62.21	87.00	-24.79	54.71	74.00	-19.29
5	7.542	57.02	49.63	9.61	66.63	87.00	-20.37	59.24	74.00	-14.76
6	8.330	60.17	53.01	9.63	69.80	87.00	-17.20	62.64	74.00	-11.36
7	8.946	53.93	46.84	9.64	63.57	87.00	-23.43	56.48	74.00	-17.52
8	9.682	49.88	42.76	9.65	59.53	87.00	-27.47	52.41	74.00	-21.59

Note :

Margin = QP/AVG Emission – Limit QP/AVG Emission = QP_R/AVG_R + Correct Factor
 Correct Factor = LISN Loss + Cable Loss A margin of -8dB means that the emission is 8dB below the limit
 The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.
 If peak data can pass, it will be shown in “QP/AVG Correct” column, if not, QP/AVG data will instead.

3.3 Test Data: LAN1\10M

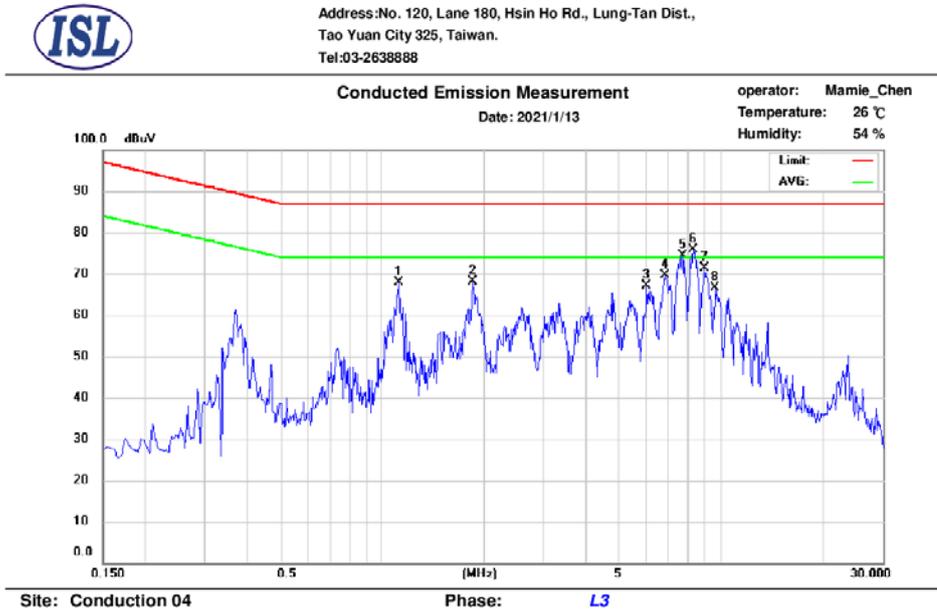


No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	1.118	50.27	39.16	9.60	59.87	87.00	-27.13	48.76	74.00	-25.24
2	1.858	51.12	40.21	9.59	60.71	87.00	-26.29	49.80	74.00	-24.20
3	6.050	48.51	39.90	9.60	58.11	87.00	-28.89	49.50	74.00	-24.50
4	6.838	52.63	44.94	9.61	62.24	87.00	-24.76	54.55	74.00	-19.45
5	7.698	58.10	51.11	9.62	67.72	87.00	-19.28	60.73	74.00	-13.27
6	8.238	59.11	51.81	9.62	68.73	87.00	-18.27	61.43	74.00	-12.57
7	8.962	53.77	46.72	9.64	63.41	87.00	-23.59	56.36	74.00	-17.64
8	9.638	48.79	41.89	9.65	58.44	87.00	-28.56	51.54	74.00	-22.46

Note :

Margin = QP/AVG Emission – Limit QP/AVG Emission = QP_R/AVG_R + Correct Factor
 Correct Factor = LISN Loss + Cable Loss A margin of -8dB means that the emission is 8dB below the limit
 The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.
 If peak data can pass, it will be shown in “QP/AVG Correct” column, if not, QP/AVG data will instead.

3.4 Test Data: LAN1\1G

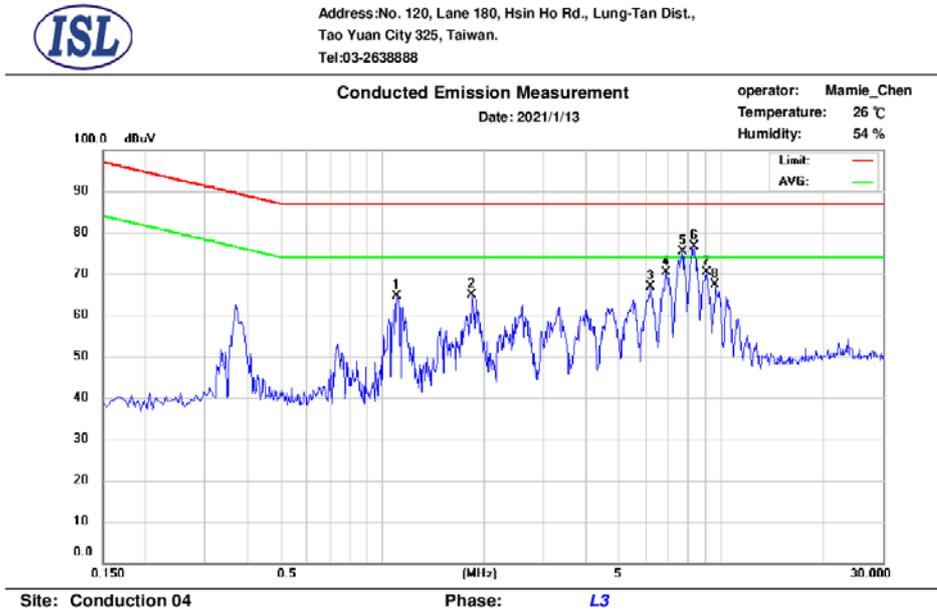


No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	1.102	50.27	45.88	9.60	59.87	87.00	-27.13	55.48	74.00	-18.52
2	1.842	51.85	47.67	9.59	61.44	87.00	-25.56	57.26	74.00	-16.74
3	6.194	50.25	43.89	9.60	59.85	87.00	-27.15	53.49	74.00	-20.51
4	6.878	53.41	46.11	9.61	63.02	87.00	-23.98	55.72	74.00	-18.28
5	7.694	58.31	51.57	9.62	67.93	87.00	-19.07	61.19	74.00	-12.81
6	8.354	60.14	53.24	9.63	69.77	87.00	-17.23	62.87	74.00	-11.13
7	9.070	54.74	47.92	9.64	64.38	87.00	-22.62	57.56	74.00	-16.44
8	9.634	49.50	42.50	9.65	59.15	87.00	-27.85	52.15	74.00	-21.85

Note :

Margin = QP/AVG Emission – Limit QP/AVG Emission = QP_R/AVG_R + Correct Factor
 Correct Factor = LISN Loss + Cable Loss A margin of -8dB means that the emission is 8dB below the limit
 The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.
 If peak data can pass, it will be shown in “QP/AVG Correct” column, if not, QP/AVG data will instead.

3.5 Test Data: LAN2\100M

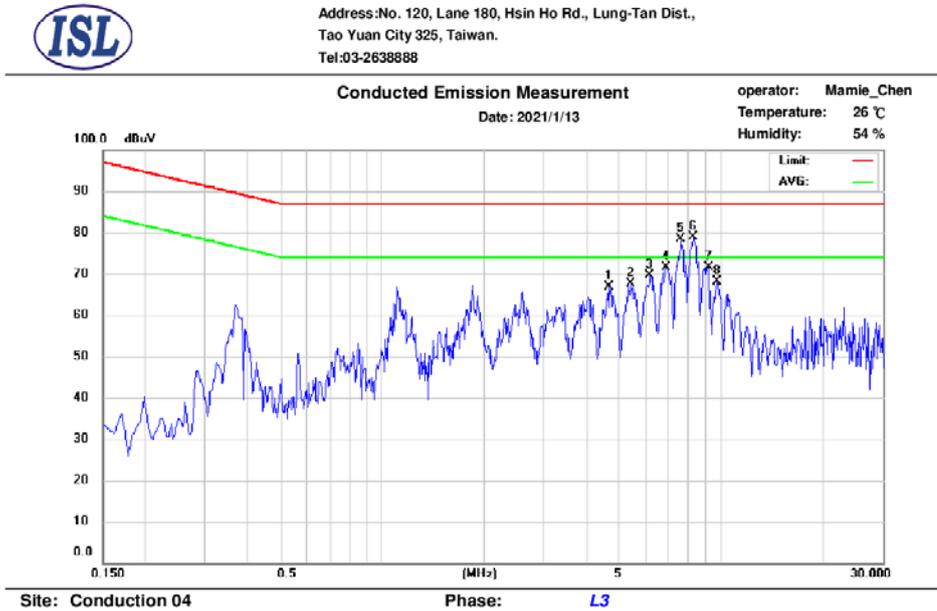


No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	4.686	48.96	40.86	9.59	58.55	87.00	-28.45	50.45	74.00	-23.55
2	5.406	50.97	43.21	9.60	60.57	87.00	-26.43	52.81	74.00	-21.19
3	6.166	53.54	46.02	9.60	63.14	87.00	-23.86	55.62	74.00	-18.38
4	6.906	56.58	49.43	9.61	66.19	87.00	-20.81	59.04	74.00	-14.96
5	7.642	61.45	54.42	9.62	71.07	87.00	-15.93	64.04	74.00	-9.96
6	8.298	62.90	55.76	9.63	72.53	87.00	-14.47	65.39	74.00	-8.61
7	9.182	54.19	47.31	9.64	63.83	87.00	-23.17	56.95	74.00	-17.05
8	9.722	52.45	45.20	9.65	62.10	87.00	-24.90	54.85	74.00	-19.15

Note :

Margin = QP/AVG Emission – Limit QP/AVG Emission = QP_R/AVG_R + Correct Factor
 Correct Factor = LISN Loss + Cable Loss A margin of -8dB means that the emission is 8dB below the limit
 The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.
 If peak data can pass, it will be shown in “QP/AVG Correct” column, if not, QP/AVG data will instead.

3.6 Test Data: LAN2\10M

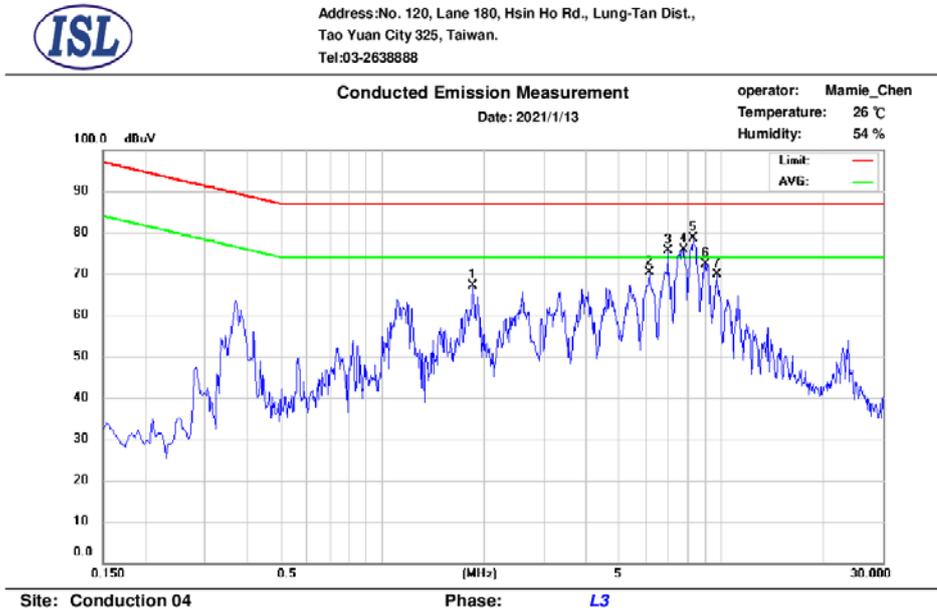


No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	1.854	53.57	42.95	9.59	63.16	87.00	-23.84	52.54	74.00	-21.46
2	6.134	53.47	45.26	9.60	63.07	87.00	-23.93	54.86	74.00	-19.14
3	6.974	56.05	48.96	9.61	65.66	87.00	-21.34	58.57	74.00	-15.43
4	7.790	58.68	50.83	9.62	68.30	87.00	-18.70	60.45	74.00	-13.55
5	8.254	62.30	54.84	9.63	71.93	87.00	-15.07	64.47	74.00	-9.53
6	9.022	57.10	49.74	9.64	66.74	87.00	-20.26	59.38	74.00	-14.62
7	9.718	51.76	44.94	9.65	61.41	87.00	-25.59	54.59	74.00	-19.41

Note :

Margin = QP/AVG Emission – Limit QP/AVG Emission = QP_R/AVG_R + Correct Factor
 Correct Factor = LISN Loss + Cable Loss A margin of -8dB means that the emission is 8dB below the limit
 The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.
 If peak data can pass, it will be shown in “QP/AVG Correct” column, if not, QP/AVG data will instead.

3.9 Test Data: LAN3\10M

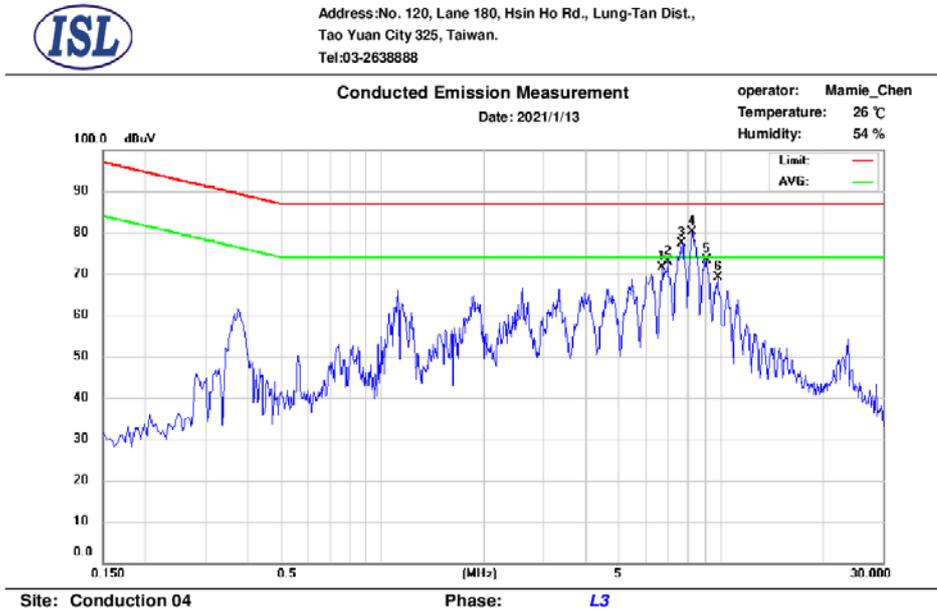

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	6.710	52.58	45.54	9.60	62.18	87.00	-24.82	55.14	74.00	-18.86
2	6.962	56.03	49.07	9.61	65.64	87.00	-21.36	58.68	74.00	-15.32
3	7.650	60.87	53.98	9.62	70.49	87.00	-16.51	63.60	74.00	-10.40
4	8.218	61.91	54.31	9.62	71.53	87.00	-15.47	63.93	74.00	-10.07
5	9.078	56.57	49.82	9.64	66.21	87.00	-20.79	59.46	74.00	-14.54
6	9.770	52.00	45.26	9.66	61.66	87.00	-25.34	54.92	74.00	-19.08

Note :

Margin = QP/AVG Emission – Limit QP/AVG Emission = QP_R/AVG_R + Correct Factor
 Correct Factor = LISN Loss + Cable Loss A margin of -8dB means that the emission is 8dB below the limit
 The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.
 If peak data can pass, it will be shown in “QP/AVG Correct” column, if not, QP/AVG data will instead.

3.10 Test Data: LAN3\1G




No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	1.110	52.78	46.31	9.60	62.38	87.00	-24.62	55.91	74.00	-18.09
2	6.106	52.90	45.14	9.60	62.50	87.00	-24.50	54.74	74.00	-19.26
3	6.926	57.10	50.14	9.61	66.71	87.00	-20.29	59.75	74.00	-14.25
4	7.594	61.30	53.69	9.61	70.91	87.00	-16.09	63.30	74.00	-10.70
5	8.370	62.56	55.65	9.63	72.19	87.00	-14.81	65.28	74.00	-8.72
6	8.910	56.05	49.21	9.64	65.69	87.00	-21.31	58.85	74.00	-15.15
7	9.166	55.10	48.33	9.64	64.74	87.00	-22.26	57.97	74.00	-16.03

Note :

Margin = QP/AVG Emission – Limit QP/AVG Emission = QP_R/AVG_R + Correct Factor
 Correct Factor = LISN Loss + Cable Loss A margin of -8dB means that the emission is 8dB below the limit
 The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.
 If peak data can pass, it will be shown in “QP/AVG Correct” column, if not, QP/AVG data will instead.

3.11 Test Data: LAN4\100M

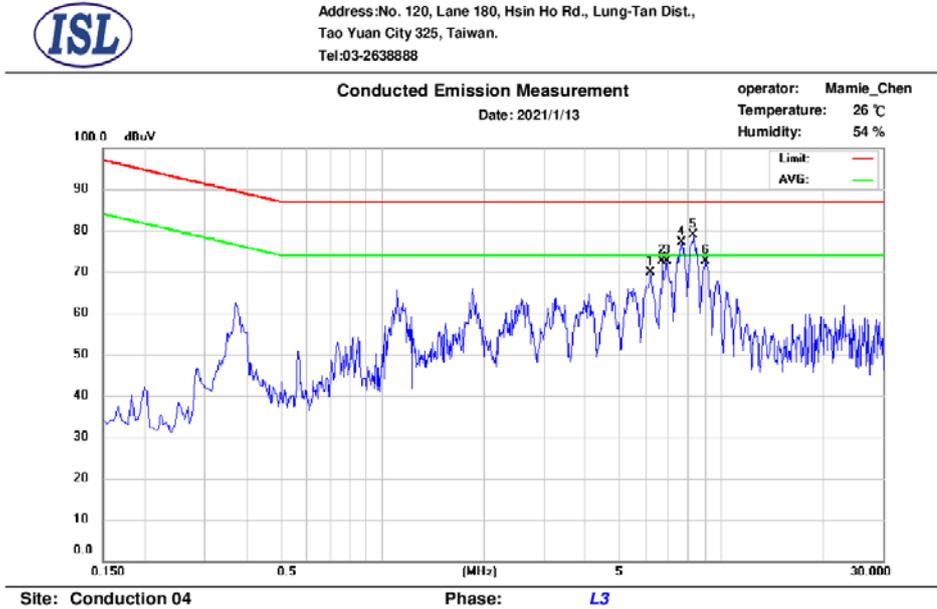


No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	6.218	53.23	46.17	9.60	62.83	87.00	-24.17	55.77	74.00	-18.23
2	6.698	52.61	45.31	9.60	62.21	87.00	-24.79	54.91	74.00	-19.09
3	6.926	56.48	49.41	9.61	66.09	87.00	-20.91	59.02	74.00	-14.98
4	7.666	61.05	54.17	9.62	70.67	87.00	-16.33	63.79	74.00	-10.21
5	8.290	62.83	55.68	9.63	72.46	87.00	-14.54	65.31	74.00	-8.69
6	9.054	57.36	50.42	9.64	67.00	87.00	-20.00	60.06	74.00	-13.94

Note :

Margin = QP/AVG Emission – Limit QP/AVG Emission = QP_R/AVG_R + Correct Factor
 Correct Factor = LISN Loss + Cable Loss A margin of -8dB means that the emission is 8dB below the limit
 The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.
 If peak data can pass, it will be shown in “QP/AVG Correct” column, if not, QP/AVG data will instead.

3.13 Test Data: LAN4\1G

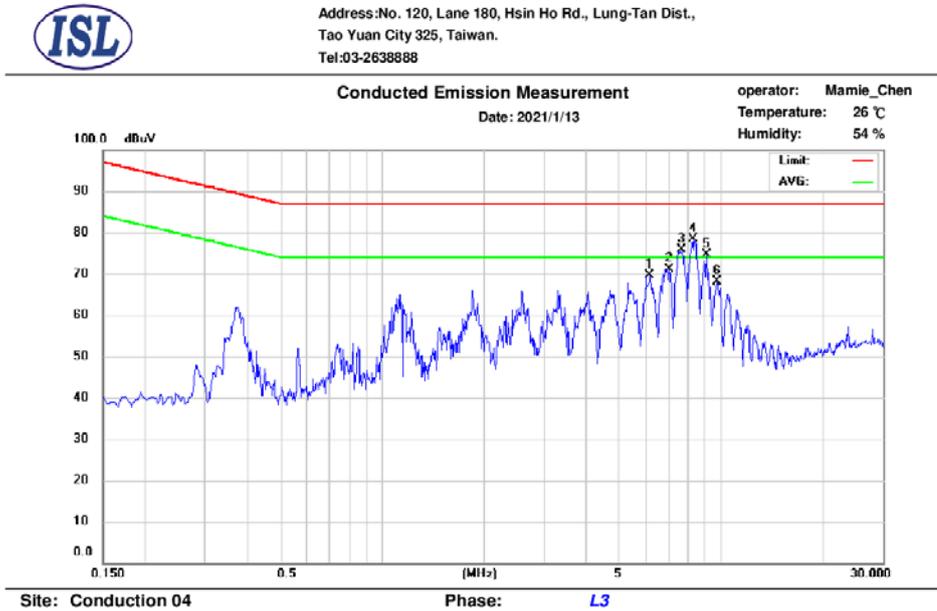

No.	Frequency (MHz)	QP_R (dBuV)	AVG_R (dBuV)	Correct Factor (dB)	QP Emission (dBuV)	QP Limit (dBuV)	QP Margin (dB)	AVG Emission (dBuV)	AVG Limit (dBuV)	AVG Margin (dB)
1	6.166	53.43	46.37	9.60	63.03	87.00	-23.97	55.97	74.00	-18.03
2	7.062	53.60	45.83	9.61	63.21	87.00	-23.79	55.44	74.00	-18.56
3	7.670	61.47	54.24	9.62	71.09	87.00	-15.91	63.86	74.00	-10.14
4	8.258	62.68	55.42	9.63	72.31	87.00	-14.69	65.05	74.00	-8.95
5	9.074	56.99	50.13	9.64	66.63	87.00	-20.37	59.77	74.00	-14.23
6	9.750	52.59	45.64	9.65	62.24	87.00	-24.76	55.29	74.00	-18.71

Note :

Margin = QP/AVG Emission – Limit QP/AVG Emission = QP_R/AVG_R + Correct Factor
 Correct Factor = LISN Loss + Cable Loss A margin of -8dB means that the emission is 8dB below the limit
 The frequency spectrum graph is for final peak graph, and the attached table is for QP/AVG test result.
 If peak data can pass, it will be shown in “QP/AVG Correct” column, if not, QP/AVG data will instead.




3.14 Test Setup Photo

Refer to the Setup Photos for Power Main Port Conducted Emissions

4. Radiated Disturbance Emissions

4.1 Test Setup and Procedure

4.1.1 Test Setup

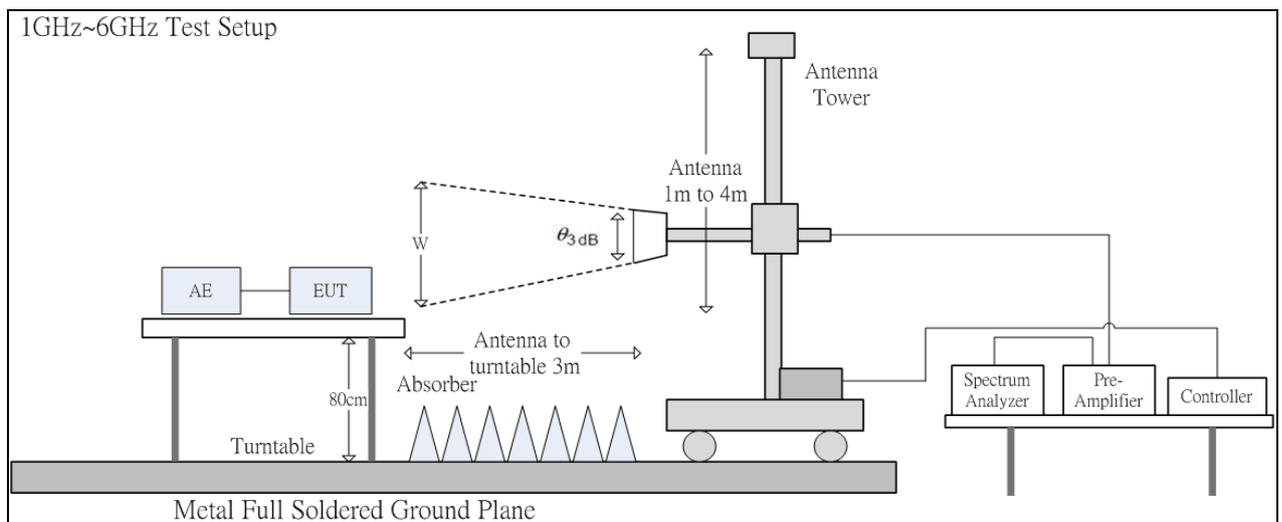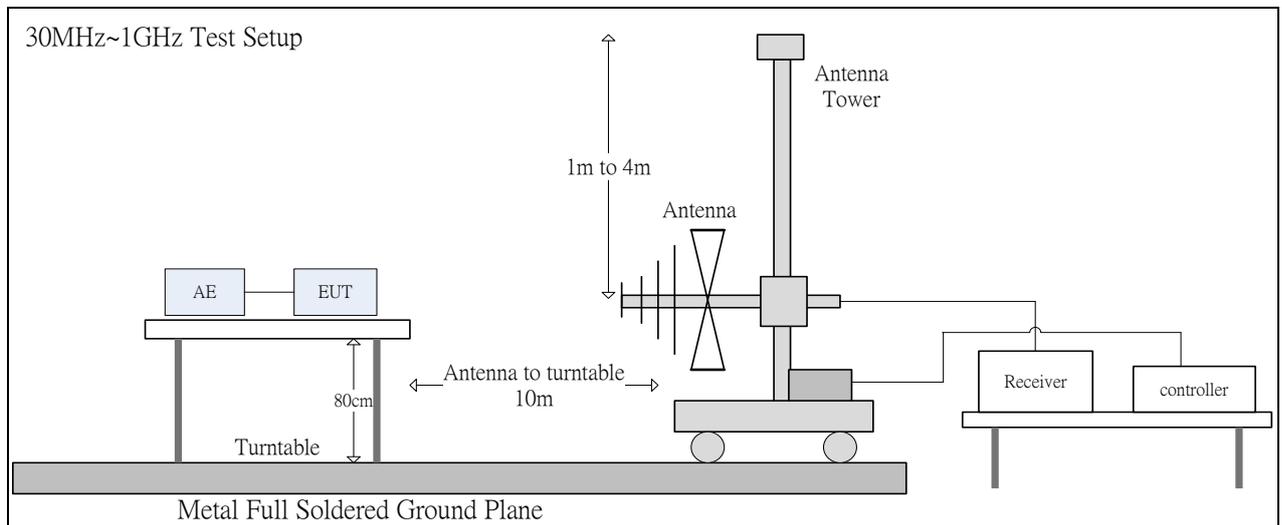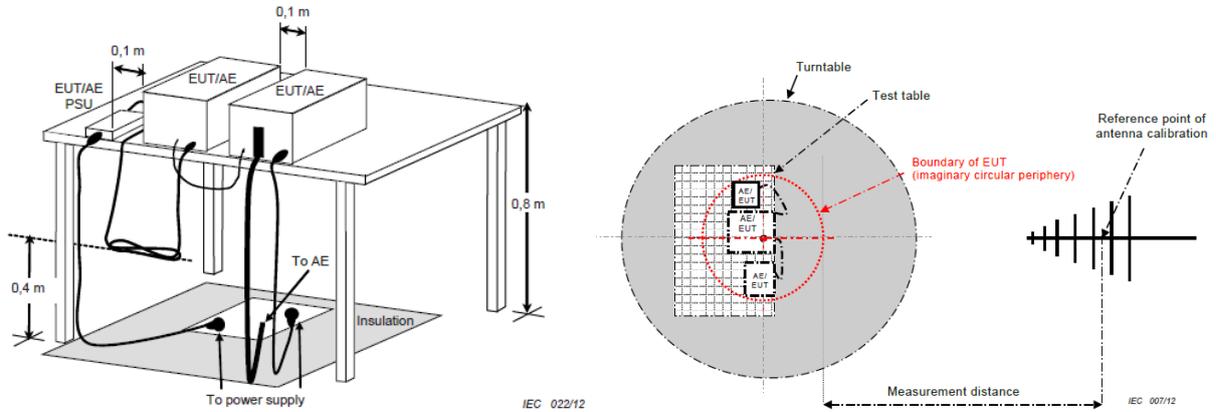

The 3dB beam width of the horn antenna used for the test is as shown in the table below.

Frequency (GHz)	E-plane	H-plane	$\theta_{3\text{dB}}(\text{min})$	d= 3 m
				w (m)
1	88°	147°	88°	5.79
2	68°	119°	68°	4.04
3	73°	92°	73°	4.44
4	70°	89°	70°	4.20
5	55°	60°	55°	3.12
6	63°	62°	62°	3.60

4.1.2 Test Procedure

The radiated emissions test will then be repeated on the chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of 10 meter chamber. Desktop EUT are set up on a FRP stand 0.8 meter above the ground or floor-standing arrangement shall be placed on the horizontal ground reference plane.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. The highest emissions between 30 MHz to 1000 MHz were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The highest emissions between 1 GHz to 6 GHz were analyzed in details by operating the spectrum analyzer in peak and average mode to determine the precise amplitude of the emissions. The test volume for a height of up to 30 cm may be obstructed by absorber placed on the ground plane.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum measurement. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings. All of the interface cables were manipulated according to EN 55032 requirements.

The highest internal source of an EUT is defined as the highest frequency generated or used within the EUT or on which the EUT operates or tunes.

If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz.

If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.

If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.

If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 6 GHz, whichever is less.

4.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 30MHz--1000MHz
 Detector Function: Quasi-Peak Mode
 Resolution Bandwidth: 120kHz

Frequency Range: Above 1 GHz to 6 GHz
 Detector Function: Peak/Average Mode
 Resolution Bandwidth: 1MHz

4.2 Limit

Radiated emissions at frequencies up to 1 GHz for Class_A equipment:

Frequency range MHz	Measurement		Class_A limits dB(μV/m)
	Distance m	Detector type / bandwidth	OATS/SAC
30-230	10	Quasi Peak / 120 kHz	40
230-1000			47
30-230	3		50
230-1000			57

Radiated emissions at frequencies above 1 GHz for Class_A equipment:

Frequency range MHz	Measurement		Class_A limits dB(μV/m)
	Distance m	Detector type / bandwidth	FSOATS
1000-3000	3	Average / 1MHz	56
3000-6000			60
1000-3000		Peak / 1MHz	76
3000-6000			80

Radiated emissions at frequencies up to 1 GHz for Class_B equipment:

Frequency range MHz	Measurement		Class_B limits dB(μV/m)
	Distance m	Detector type / bandwidth	OATS/SAC
30-230	10	Quasi Peak / 120 kHz	30
230-1000			37
30-230	3		40
230-1000			47


Radiated emissions at frequencies above 1 GHz for Class_B equipment:

Frequency range MHz	Measurement		Class_B limits dB(μ V/m)
	Distance m	Detector type / bandwidth	FSOATS
1000-3000	3	Average / 1MHz	50
3000-6000			54
1000-3000		Peak / 1MHz	70
3000-6000			74

Radiated emissions from FM receivers:

Frequency range MHz	Measurement		Class_B limits dB(μ V/m)		
	Distance m	Detector type / bandwidth	Fundamental	Harmonics	
			OATS/SAC	OATS/SAC	
30-230	10	Quasi Peak / 120 kHz	50	42	
230-300				42	
300-1000				46	
30-230	3		Quasi Peak / 120 kHz	60	52
230-300					52
300-1000					56

4.3 Radiation Test Data: Configuration 1 - Radiated Emissions (Horizontal)

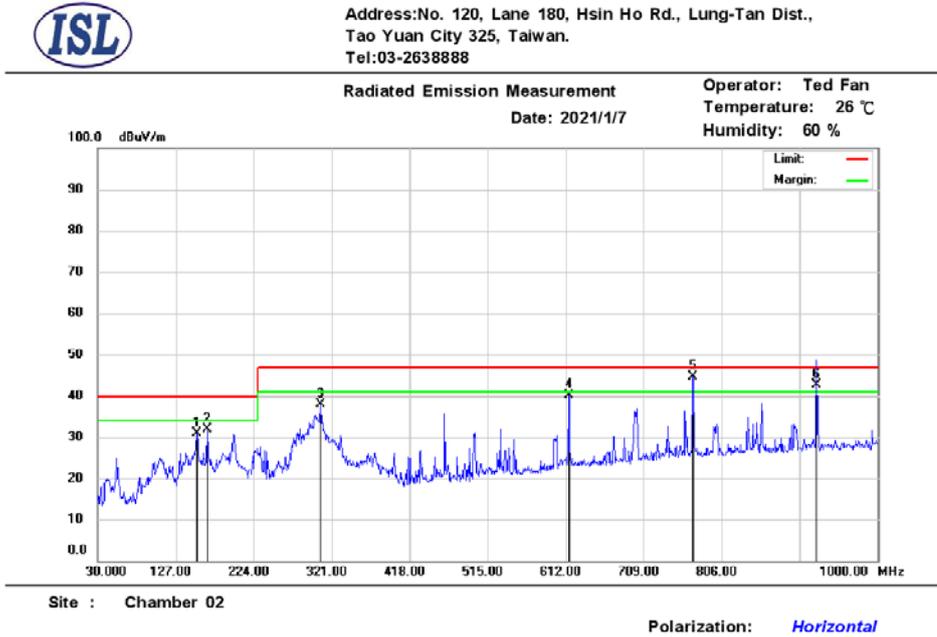

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	153.19	46.73	-15.80	30.93	40.00	-9.07	400	255	peak
2	166.77	47.77	-15.82	31.95	40.00	-8.05	400	255	peak
3	307.42	51.86	-13.96	37.90	47.00	-9.10	400	27	peak
4	615.88	45.87	-5.79	40.08	47.00	-6.92	400	357	peak
5	770.11	47.67	-3.13	44.54	47.00	-2.46	400	224	peak
6	924.00	43.97	-1.32	42.65	47.00	-4.35	400	177	QP

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters

Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718


Radiated Emission Measurement

Date: 2020/12/31

Operator: James Kuo

Temperature: 26 °C

Humidity: 60 %

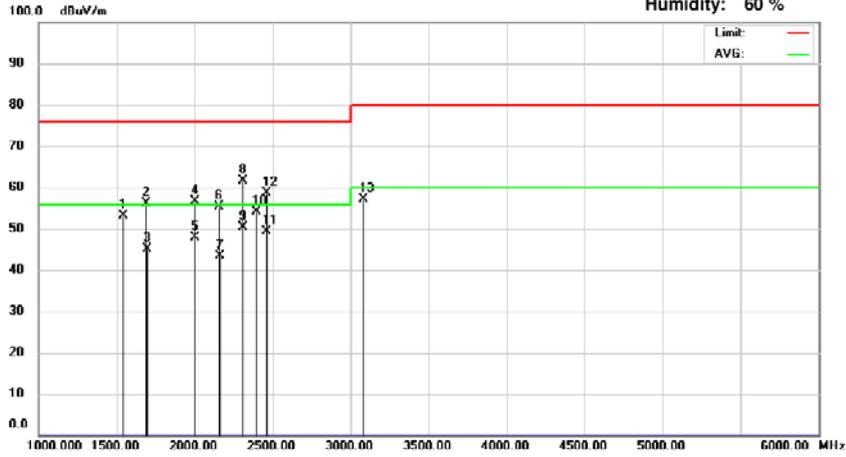

Site : Chamber 14

Polarization: Horizontal

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1540.00	69.48	-16.42	53.06	76.00	-22.94	199	11	peak
2	1690.00	70.99	-14.97	56.02	76.00	-19.98	189	238	peak
3	1693.90	60.10	-14.93	45.17	56.00	-10.83	190	240	AVG
4	2000.00	69.29	-12.68	56.61	76.00	-19.39	100	73	peak
5	2001.91	60.53	-12.67	47.86	56.00	-8.14	101	70	AVG
6	2155.00	67.73	-12.41	55.32	76.00	-20.68	185	274	peak
7	2155.59	55.86	-12.41	43.45	56.00	-12.55	186	278	AVG
8	2310.00	73.70	-12.17	61.53	76.00	-14.47	100	85	peak
9	2310.00	62.63	-12.17	50.46	56.00	-5.54	101	81	AVG
10	2395.00	66.11	-11.94	54.17	76.00	-21.83	100	278	peak
11	2464.23	60.80	-11.51	49.29	56.00	-6.71	158	323	AVG
12	2465.00	70.21	-11.50	58.71	76.00	-17.29	158	319	peak
13	3080.00	67.67	-10.48	57.19	80.00	-22.81	208	50	peak

* Note:

Margin = Emission - Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters


Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

-Radiated Emissions (Vertical)



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-2638888

Radiated Emission Measurement
Date: 2021/1/7
Operator: Ted Fan
Temperature: 26 °C
Humidity: 60 %

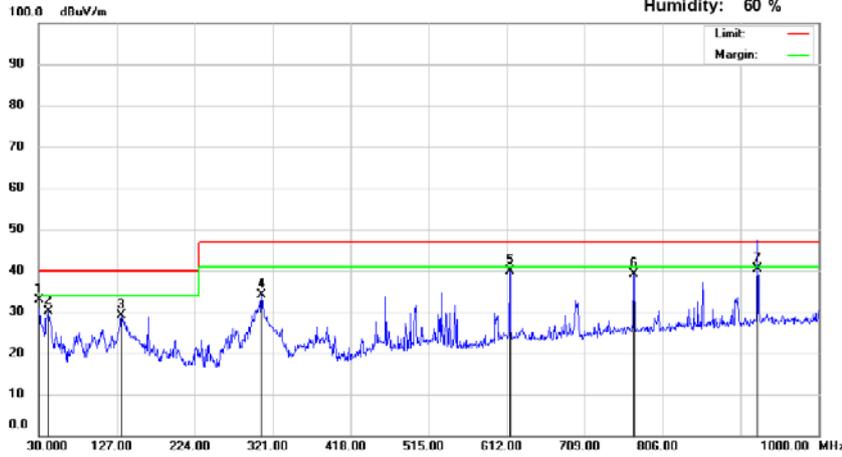

Site : Chamber 02

Polarization: Vertical

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor (dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	30.00	51.73	-18.81	32.92	40.00	-7.08	400	20	peak
2	41.64	47.54	-17.49	30.05	40.00	-9.95	400	209	peak
3	132.82	46.24	-17.12	29.12	40.00	-10.88	400	246	peak
4	307.42	48.14	-13.96	34.18	47.00	-12.82	400	0	peak
5	615.88	45.79	-5.79	40.00	47.00	-7.00	400	163	peak
6	770.11	42.23	-3.13	39.10	47.00	-7.90	400	257	peak
7	924.00	41.58	-1.32	40.26	47.00	-6.74	313	42	QP

* Note:

Margin = Emission - Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain

A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 10 meters


Below 1GHz test, if the peak measured value meets the QP limit, it is unnecessary to perform the QP measurement.



Address: No. 120, Lane 180, Hsin Ho Rd., Lung-Tan Dist.,
Tao Yuan City 325, Taiwan.
Tel: 03-4071718

Radiated Emission Measurement
Date: 2020/12/31

Operator: James Kuo
Temperature: 26 °C
Humidity: 60 %

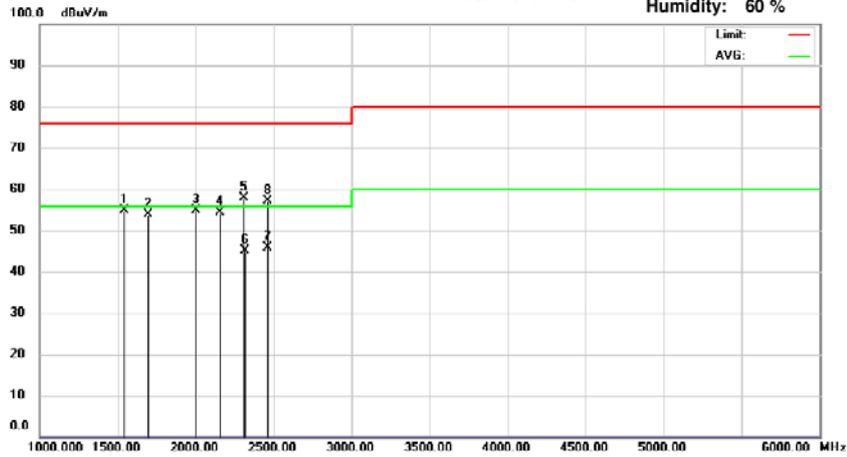

Site : Chamber 14

Polarization: Vertical

Mk.	Frequency (MHz)	RX_R (dBuV)	Correct Factor(dB/m)	Emission (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.Pos (cm)	Tab.Pos (deg.)	Detector
1	1540.00	71.26	-16.42	54.84	76.00	-21.16	100	191	peak
2	1695.00	68.82	-14.92	53.90	76.00	-22.10	113	144	peak
3	2000.00	67.50	-12.68	54.82	76.00	-21.18	134	186	peak
4	2155.00	66.89	-12.41	54.48	76.00	-21.52	120	291	peak
5	2310.00	70.10	-12.17	57.93	76.00	-18.07	197	320	peak
6	2310.23	57.31	-12.17	45.14	56.00	-10.86	198	324	AVG
7	2463.99	57.36	-11.52	45.84	56.00	-10.16	152	0	AVG
8	2465.00	68.63	-11.50	57.13	76.00	-18.87	153	0	peak

* Note:

Margin = Emission – Limit

Emission = Radiated Amplitude + Correct Factor

Correct Factor = Antenna Correction Factor + Cable Loss – Pre-Amplifier Gain


A margin of -8dB means that the emission is 8dB below the limit

Antenna Distance: 3 meters


Above 1GHz test, if the peak measured value meets the average limit, it is unnecessary to perform the average measurement.

4.4 Test Setup Photo


Front View (30MHz~1GHz)

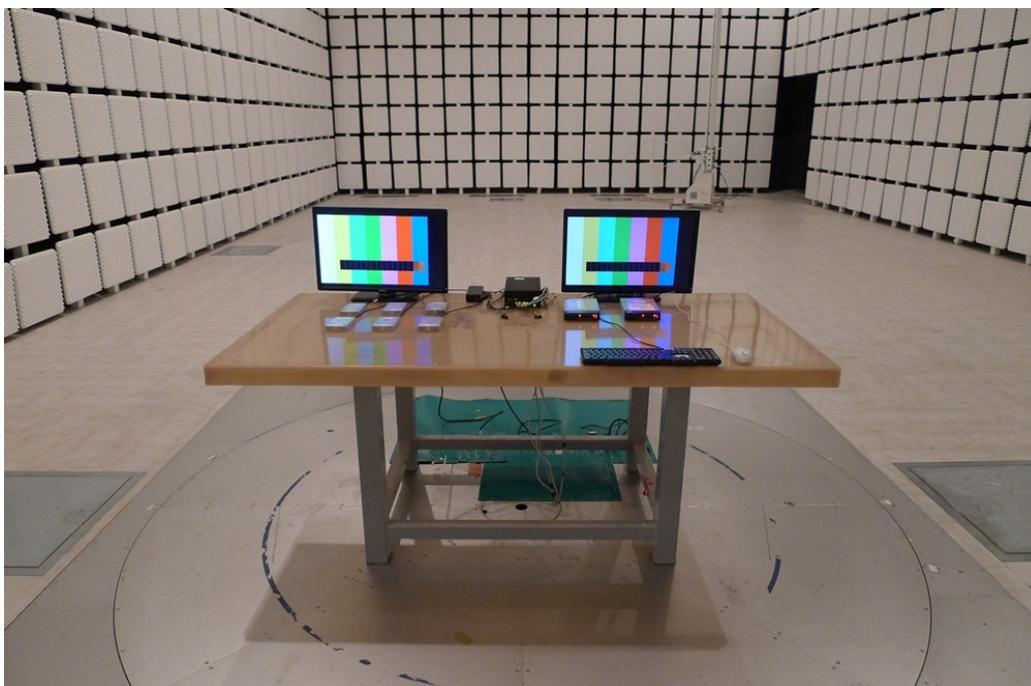


Back View (30MHz~1GHz)

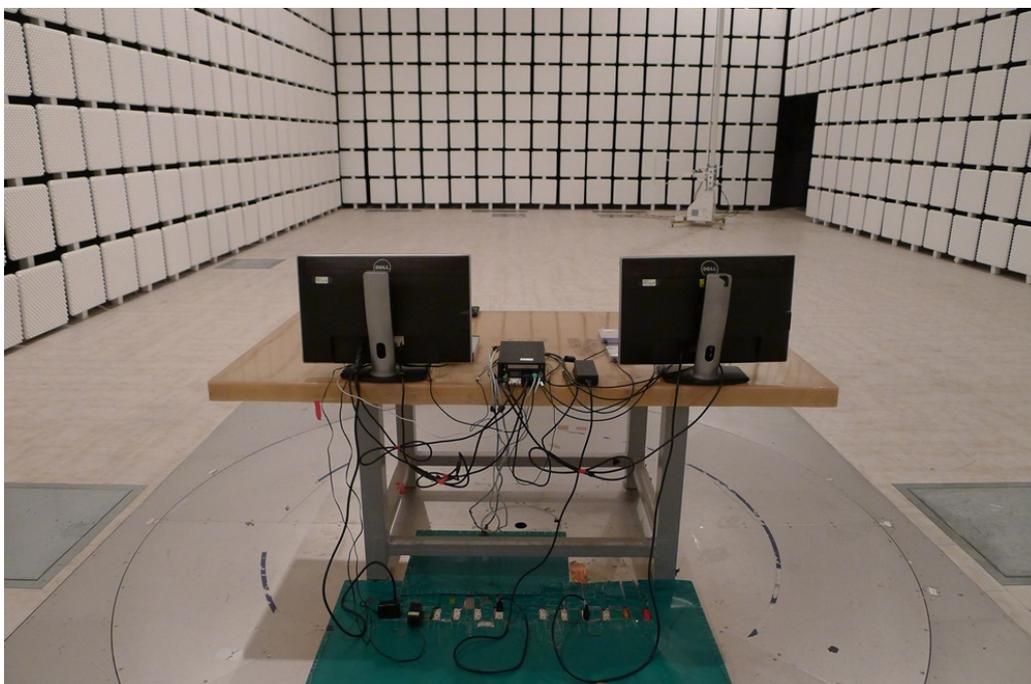

Front View (above 1GHz)

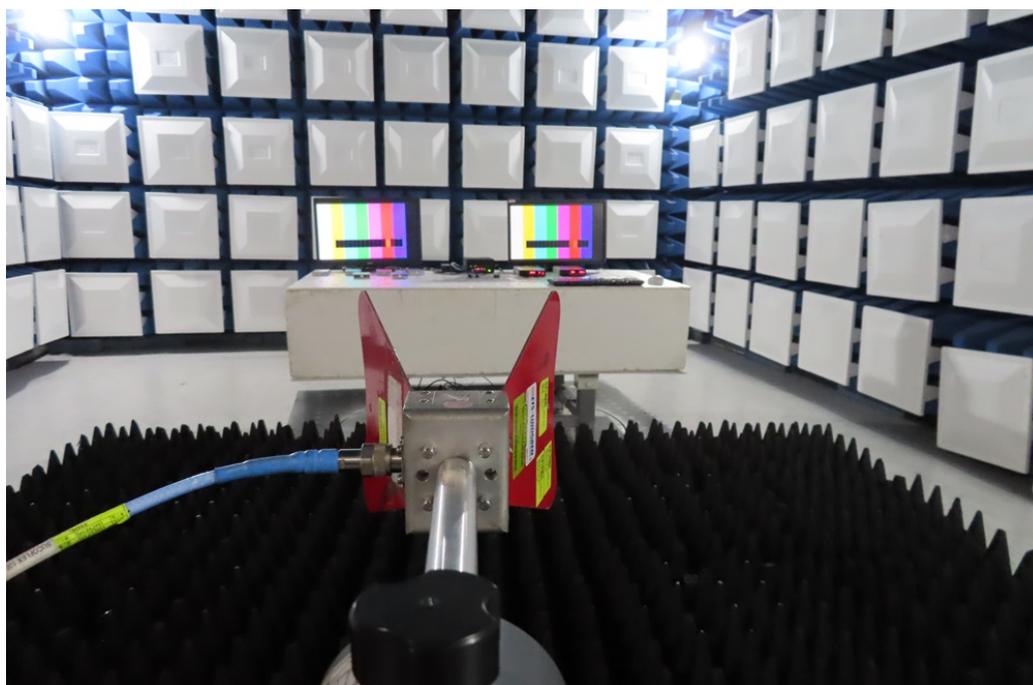


Back View (above 1GHz)

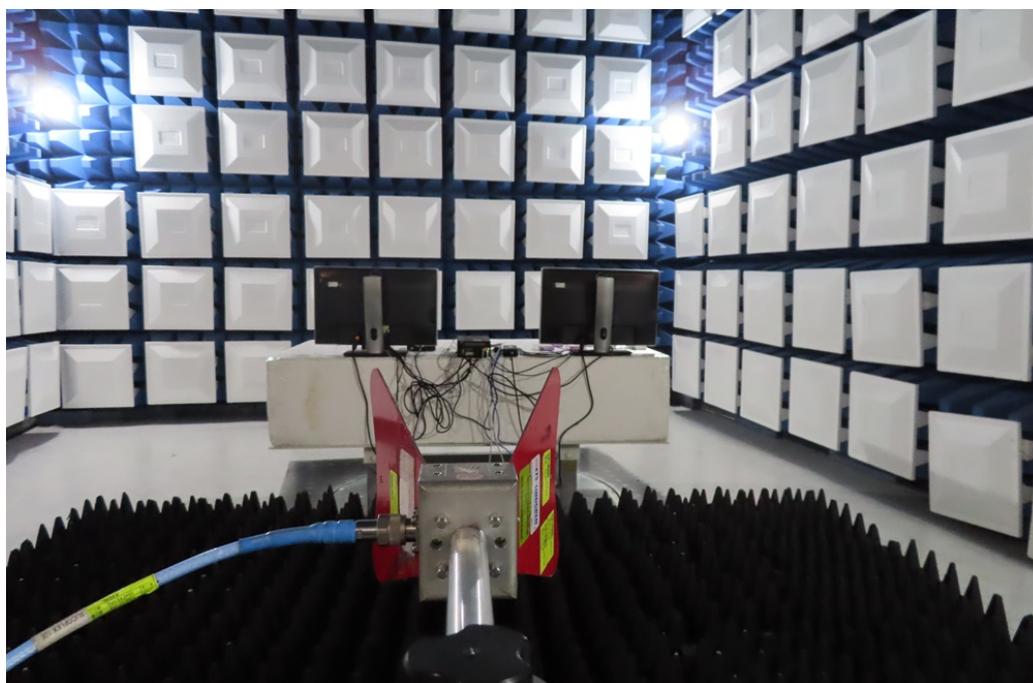

5. Voltage Disturbance Emissions at Antenna Terminals

5.1 Test Setup and Procedure

5.1.1 Test Setup

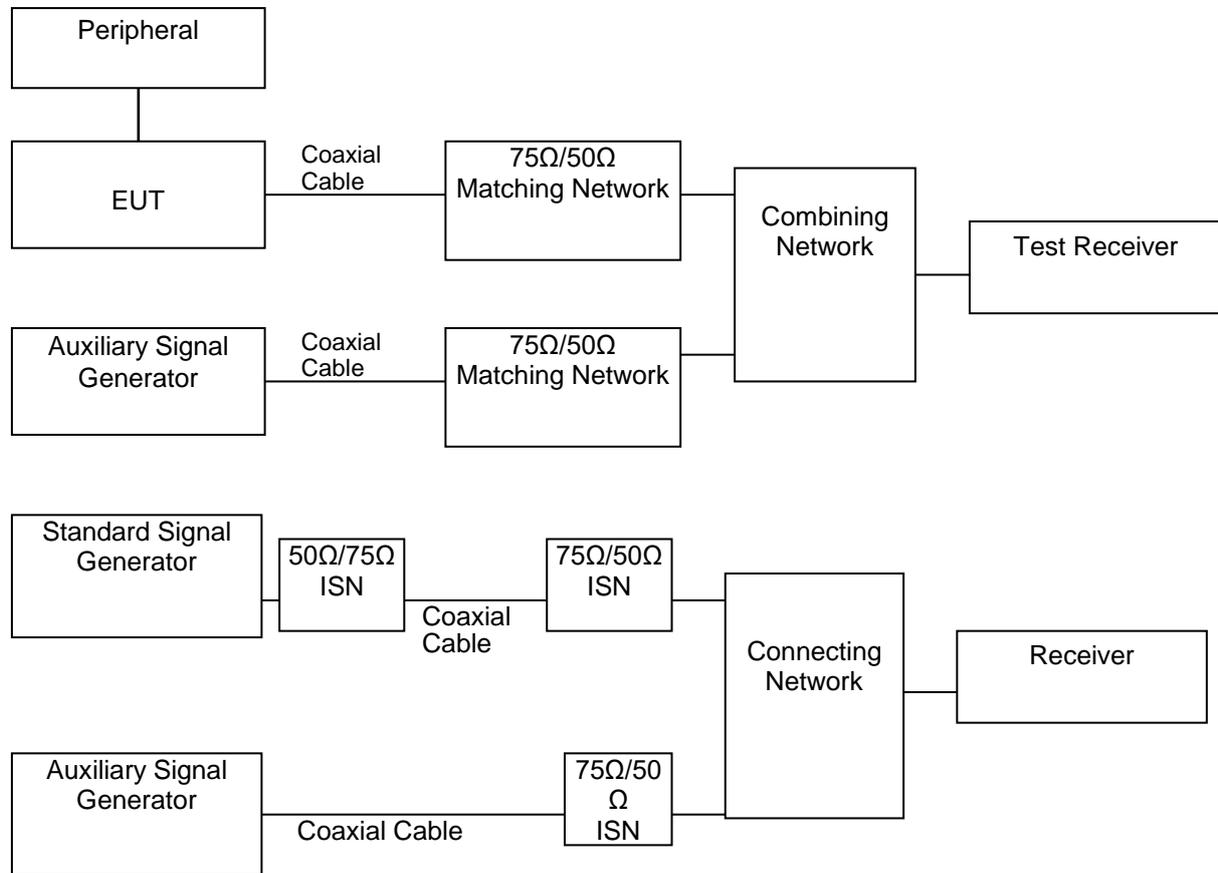

5.1.2 Test Procedure

The output level of the auxiliary signal generator was set to 70dBuV at the EUT antenna terminal with 75 ohms impedance with an un-modulated carrier.

The highest emissions were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The power of EUT was switched off to make sure the emission was not contributed by the auxiliary signal generator. While doing so, the interconnecting cables and major parts of the system were moved around to maximize the emission.

5.1.3 EMI Receiver Configuration (for the frequencies tested)

Frequency Range:	30MHz-2150MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120kHz

5.1.4 Limit

Applicable to:

1. TV broadcast receiver tuner ports with an accessible connector.
2. RF modulator output ports.
3. FM broadcast receiver tuner ports with an accessible connector.

Table clause	Frequency range MHz	Detector type/ bandwidth	Class B limits dB(μV) 75 Ω			Applicability
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics	
A12.1	30 – 950	For frequencies ≤1 GHz Quasi Peak/ 120 kHz	46	46	46	See a)
	950 – 2 150		46	54	54	
A12.2	950 – 2 150		46	54	54	See b)
A12.3	30 – 300		46	54	50	See c)
	300 – 1 000	52				
A12.4	30 – 300	For frequencies ≥1 GHz	46	66	59	See d)
	300 – 1 000				52	
A12.5	30 – 950	Peak/ 1 MHz	46	76	46	See e)
	950 – 2 150			n/a	54	

a) Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.

b) Tuner units (not the LNB) for satellite signal reception.

c) Frequency modulation audio receivers and PC tuner cards.

d) Frequency modulation car radios.


e) Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports.

****Remarks: It is not necessary to be tested on this item.**

6. Differential Voltage Emissions

6.1 Test Setup and Procedure

6.1.1 Test Setup

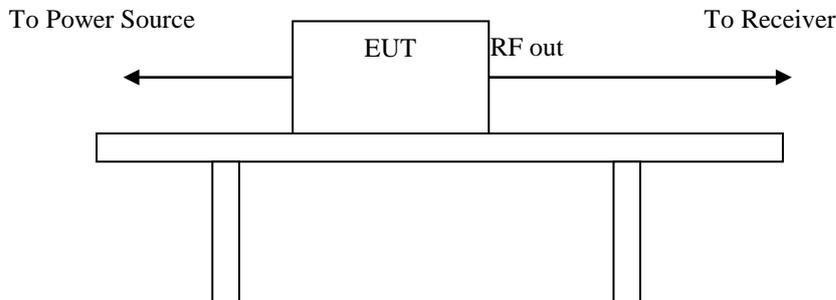

6.1.2 Test Procedure

The output level of the auxiliary signal generator was set to 70dBuV at the EUT antenna terminal with 75 ohms impedance with an un-modulated carrier.

The highest emissions were analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. The power of EUT was switched off to make sure the emission was not contributed by the auxiliary signal generator. While doing so, the interconnecting cables and major parts of the system were moved around to maximize the emission.

6.1.3 EMI Receiver Configuration (for the frequencies tested)

Frequency Range:	30MHz-2150MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth:	120kHz

6.1.4 Limit

Applicable to:

- 1. TV broadcast receiver tuner ports with an accessible connector.**
- 2. RF modulator output ports.**
- 3. FM broadcast receiver tuner ports with an accessible connector.**

Table clause	Frequency range MHz	Detector type/ bandwidth	Class B limits dB(μV) 75 Ω			Applicability
			Other	Local Oscillator Fundamental	Local Oscillator Harmonics	
A12.1	30 – 950	For frequencies ≤1 GHz Quasi Peak/ 120 kHz	46	46	46	See a)
	950 – 2 150		46	54	54	
A12.2	950 – 2 150		46	54	54	See b)
A12.3	30 – 300		For frequencies ≥1 GHz	46	54	50
	300 – 1 000	52				
A12.4	30 – 300	Peak/ 1 MHz	46	66	59	See d)
	300 – 1 000				52	
A12.5	30 – 950	Peak/ 1 MHz	46	76	46	See e)
	950 – 2 150			n/a	54	

a) Television receivers (analogue or digital), video recorders and PC TV broadcast receiver tuner cards working in channels between 30 MHz and 1 GHz, and digital audio receivers.

b) Tuner units (not the LNB) for satellite signal reception.

c) Frequency modulation audio receivers and PC tuner cards.

d) Frequency modulation car radios.



e) Applicable to EUTs with RF modulator output ports (for example DVD equipment, video recorders, camcorders and decoders etc.) designed to connect to TV broadcast receiver tuner ports.

****Remarks: It is not necessary to be tested on this item.**

7. Outdoor units of home satellite receiving systems

7.1 Test Setup and Procedure

7.1.1 Test Setup

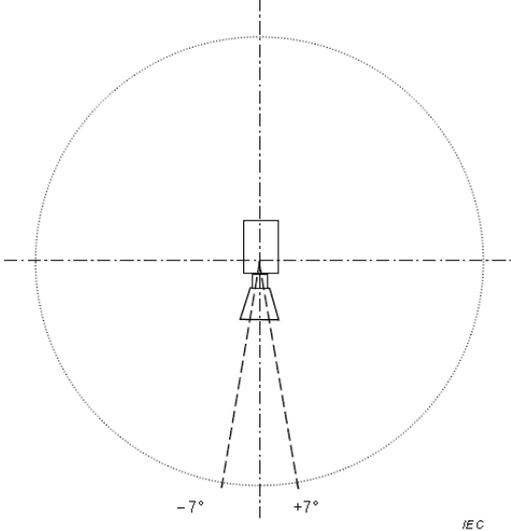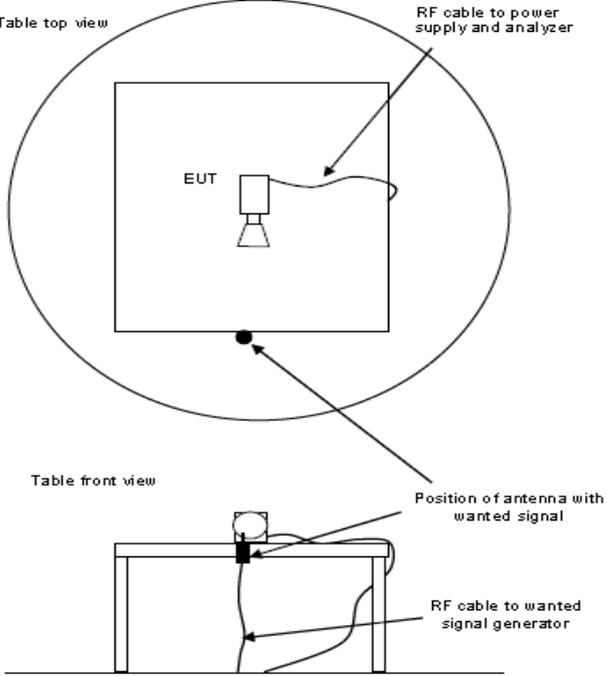	
<p>Description of $\pm 7^\circ$ of the main beam axis of the EUT</p>	<p>Measurement arrangements of transmit antenna for the wanted signal</p>

7.1.2 Test Procedure

The input signal shall be adjusted to get the maximum rated output level from the EUT. For the measurement in the frequency range from 30 MHz to 18 GHz the input signal shall be adjusted so that the output frequency is within this frequency range. For the measurement in the frequency range above 1 GHz, the frequency of the input signal shall be adjusted in such a way that the EUT is measured, as a minimum, at the lowest, middle and highest rated output frequency within the measured frequency range.

7.1.3 Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range: 30MHz--1000MHz
 Detector Function: Quasi-Peak Mode
 Resolution Bandwidth: 120kHz

Frequency Range: Above 1000MHz
 Detector Function: Peak/Average Mode
 Resolution Bandwidth: 1MHz

7.1.4 Limit

Table Clause	Frequency Range MHz	Measurement			Class B Limits	Applicable to
		Facility (see Table A.1)	Distance m	Detector type / Bandwidth		
A7.1	30 to 1 000	SAC / OATS / FAR	See Table A.4	Quasi Peak / 120 kHz	See Table A.4	
A7.2	1 000 to 2 500	FSOATS	3	Average / 1 MHz	50 dB(μV/m)	LO leakage and spurious radiated emissions from the EUT, in the region outside ±7° of the main beam axis. See Figure H.1
	2 500 to 18 000				64 dB(μV/m)	
A7.3	1 000 to 18 000	FSOATS	3	Average / 1 MHz	37 dB(μV/m)	LO leakage from the EUT, in the region within ±7° of the main beam axis. See Figure H.1
A7.4	1 000 to 18 000	Conducted (Clause H.4)	n/a	Average / 1 MHz	30 dBpW	

For details of the EUT configuration, see Annex H.

For radiated emissions measurements at frequencies up to 1 GHz, the requirements defined in Table A.4 shall be satisfied.

Apply the appropriate limits across the entire frequency range.

Apply the limits defined in table Clause A7.1 and A7.2. Also apply the limits defined in either table Clause A7.3 or A7.4.

****Remarks: It is not necessary to be tested on this item.**

8. Electrostatic discharge (ESD) immunity

8.1 Test Specification and Setup

8.1.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-2/ IEC 61000-4-2 (details referred to Sec 1.2)
Test Level:	Air +/- 2 kV, +/- 4 kV, +/- 8 kV Contact +/- 4 kV
Criteria:	B
Test Procedure	refer to ISL QA -T4-E-S7

Selected Test Point


Air: discharges were applied to slots, aperture or insulating surfaces. 10 single air discharges were applied to each selected points.

Contact: Total 200 discharges minimum were to the selected contact points.

Indirect Contact Points: 25 discharges were applied to center of one edge of VCP and each EUT side of HCP with 10 cm away from EUT.

8.1.2 Test Setup

EUT is 1m from the wall and other metallic structure. When Battery test mode is needed, a cable with one 470KΩ resistor at two rare ends is connected from metallic part of EUT and screwed to HCP.

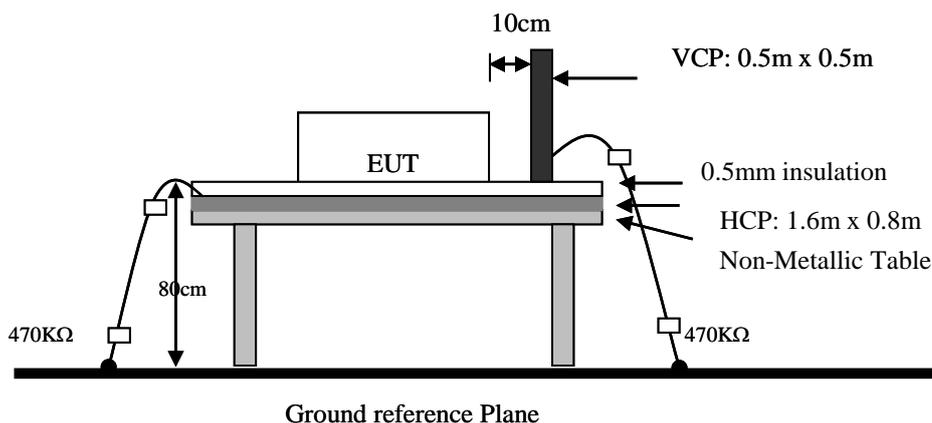

8.1.3 Test Result

Performance of EUT complies with the given specification

8.2 Test Data: Configuration

Basic Standard	EN 61000-4-2		Date	2021-01-11							
EUT Model Name	LPC-49xxxx		Engineer	SAWYER							
Adapter	FSP(Model:FSP180-AAAN3)		Equipment & Test Site	EM TEST(Model: Dito)							
Barometer Pressure	99.9kPa		ESD 2F								
Temperature	20°C										
Humidity	40%										
Voltage/Freq.	230 Vac/50Hz										
A=criteria A, B=criteria B, C=criteria C → Blue arrow represent Air discharge point → Red arrow represent Contact discharge point ND=No Discharge; Meets criteria but unable to obtain an electrostatic discharge (ESD) at this test point. X=EUT DOES NOT meet the acceptance criteria A=criteria A, B=criteria B, C=criteria C											
Contact Discharge	Voltage kV 25 Discharge @ 1 PPS										
Test Location	+4	-4									Comments
1	A	A									
2	A	A									
3	A	A									
4	A	A									
5	A	A									
6	B	B									Note1
7	B	B									Note1
8	B	B									Note1
9	A	A									
10	A	A									
11	A	A									
12	A	A									
13	A	A									
14	A	A									
15	A	A									
16	A	A									
17	A	A									
18	A	A									
19	A	A									
20	A	A									
21	A	A									
22	A	A									
23	A	A									
24	B	B									Note1
25	B	B									Note1
26	B	B									Note1
27	B	B									Note1
28	B	B									Note1

Air Discharge		Voltage kV 10 Discharge @ 1 PPS									
Test Location	+2	-2	+4	-4	+8	-8					Comments
1	ND	ND	A	A	A	A					
2	ND	ND	A	A	A	A					
3	ND	ND	A	A	A	A					
4	ND	ND	A	A	A	A					
5	ND	ND	A	A	A	A					
6	ND	ND	A	A	A	A					
7	ND	ND	A	A	A	A					
8	ND	ND	A	A	A	A					
9	ND	ND	A	A	A	A					
10	ND	ND	A	A	A	A					
11	ND	ND	A	A	A	A					
12	ND	ND	A	A	A	A					
13	ND	ND	A	A	A	A					
14	ND	ND	A	A	A	A					
15	ND	ND	A	A	A	A					
Indirect Discharge		Voltage kV 25 Discharge @ 1 PPS									
Test Location	+4	-4									Comments
VCP Front	A	A									
VCP Right	A	A									
VCP Left	A	A									
VCP Back	A	A									
Test Location	+4	-4									Comments
HCP Front	A	A									
HCP Right	A	A									
HCP Left	A	A									
HCP Back	A	A									
Additional Notes: A=criteria A, B=criteria B, C=criteria C											
Note1: LAN link function error, but it can recover automatically.											

8.3 Test Point

Red arrow lines indicate the contact points, and blue arrow lines indicate the air points.

Figure 1 : Test Point Assignments Discharge:

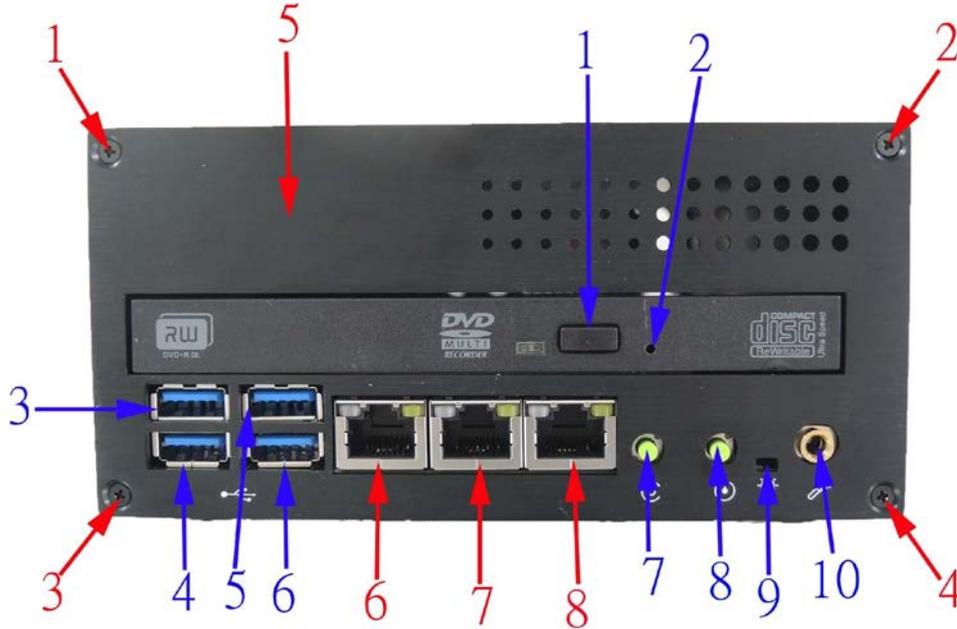



Figure 2 : Test Point Assignments Discharge:



Figure 3 : Test Point Assignments Discharge:



Figure 4 : Test Point Assignments Discharge:

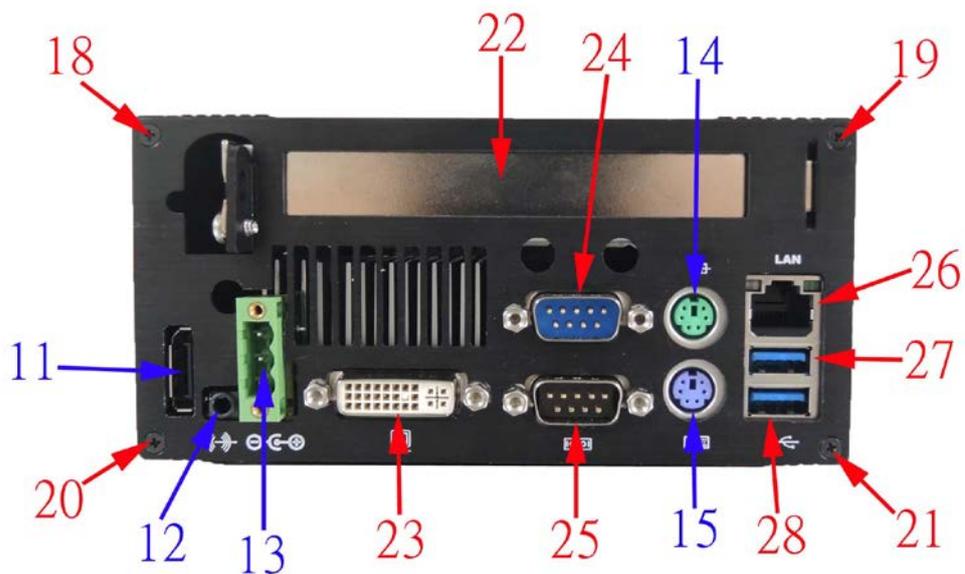

8.4 Test Setup Photo



9. Radio-Frequency, Electromagnetic Field immunity


9.1 Test Specification and Setup

9.1.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-3/ IEC 61000-4-3 (details referred to Sec 1.2)
Test Level:	3 V/m
Modulation:	AM 1kHz 80%
Frequency range:	80 MHz~1 GHz
Frequency Step:	1% of last step frequency
Dwell time:	2s
Polarization:	Vertical and Horizontal
EUT Azimuth Angle	<input checked="" type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input checked="" type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°
Criteria:	A
Test Procedure	refer to ISL QA -T4-E-S8

9.1.2 Test Setup

The field sensor is placed at one calibration grid point to check the intensity of the established fields on both polarizations. EUT is adjusted to have each side of EUT face coincident with the calibration plane. A CCD camera and speakers are used to monitor the condition of EUT for the performance judgment.

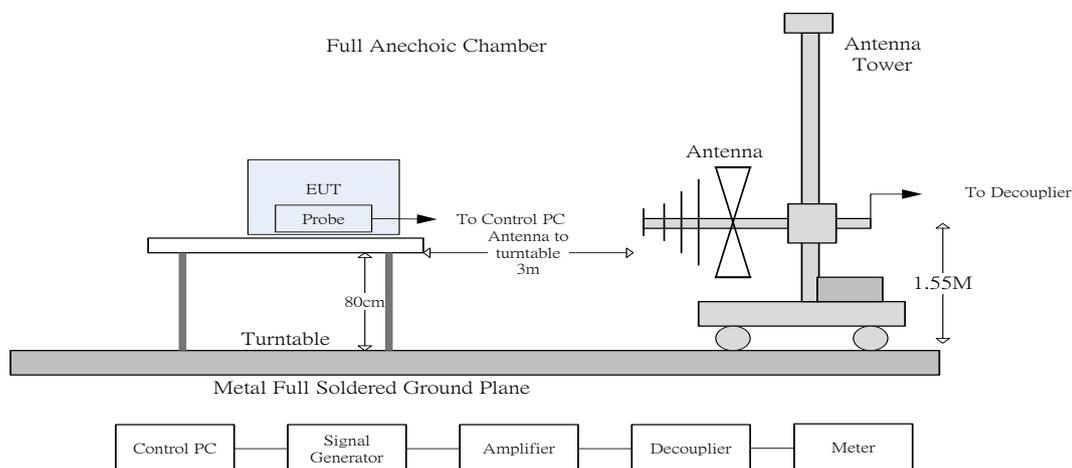


9.1.3 Test Result

Performance of EUT complies with the given specification

9.2 Test Data: Configuration

Basic Standard	EN 61000-4-3		Date					
EUT Model Name	LPC-49xxxx		2021-01-04					
Power	FSP(Model:FSP180-AAAN3)		Engineer					
Barometer Pressure	102.3kPa		SAWYER					
Temperature	23°C		Equipment & Test Site					
Humidity	56%		Chamber 04					
Voltage/Freq.	230 Vac/50Hz							
A=criteria A, B=criteria B, C=criteria C								
EUT Angle	Frequency		Dwell time	Modulation	Level (V/m)	Antenna Polarization	EUT Status	Comments
	Range (MHz)	Steps %						
0°(front)	80-1000	1	2s	80% @ 1kHz	3	Vertical	A	
90°(left)	80-1000	1	2s	80% @ 1kHz	3	Vertical	A	
180°(back)	80-1000	1	2s	80% @ 1kHz	3	Vertical	A	
270°(right)	80-1000	1	2s	80% @ 1kHz	3	Vertical	A	
0°(front)	80-1000	1	2s	80% @ 1kHz	3	Horizontal	A	
90°(left)	80-1000	1	2s	80% @ 1kHz	3	Horizontal	A	
180°(back)	80-1000	1	2s	80% @ 1kHz	3	Horizontal	A	
270°(right)	80-1000	1	2s	80% @ 1kHz	3	Horizontal	A	
Additional Notes: A=criteria A, B=criteria B, C=criteria C								

9.3 Test Setup Photo

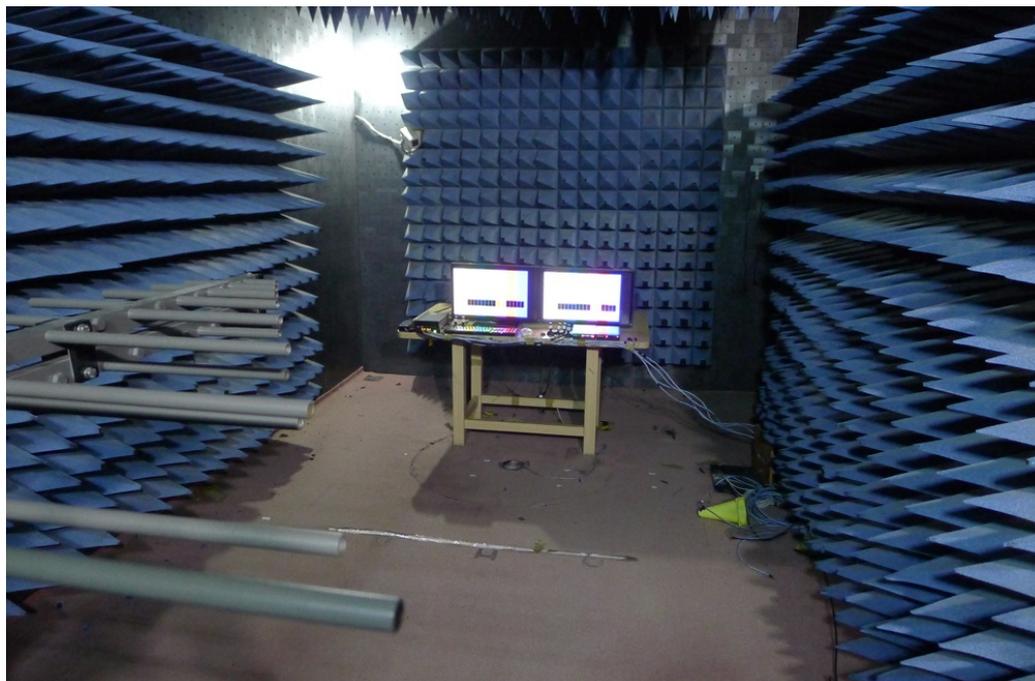

10. Electrical Fast transients/burst immunity

10.1 Test Specification and Setup

10.1.1 Test Specification

Port:	AC mains; Twisted Pair LAN Port
Basic Standard:	EN 61000-4-4/ IEC 61000-4-4 (details referred to Sec 1.2)
Test Level:	AC Power Port: +/- 1 kV Twisted Pair LAN Port (I/O Cables): +/- 0.5 kV
Rise Time:	5ns
Hold Time:	50ns
Burst Period:	300ms
Repetition Frequency:	5kHz
Criteria:	B
Test Procedure	refer to ISL QA -T4-E-S9

Test Procedure



The EUT was setup on a nonconductive table 0.1 m above a reference ground plane.

Test Points	Polarity	Result	Comment
Line	+	N	60 sec
	-	N	60 sec
Neutral	+	N	60 sec
	-	N	60 sec
Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral	+	N	60 sec
	-	N	60 sec
Line to Ground	+	N	60 sec
	-	N	60 sec
Neutral to Ground	+	N	60 sec
	-	N	60 sec
Line to Neutral to Ground	+	N	60 sec
	-	N	60 sec
Capacitive coupling clamp	+	N	60 sec
	-	N	60 sec

Note: 'N' means normal, the EUT function is correct during the test.

10.1.2 Test Setup

EUT is at least 50cm from the conductive structure.

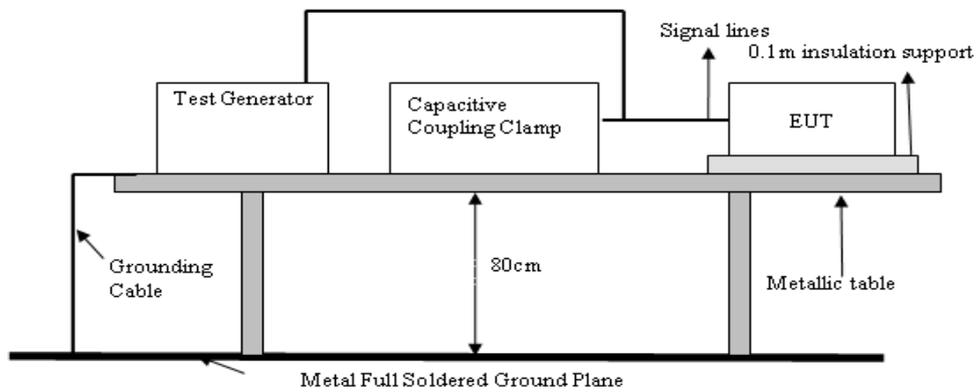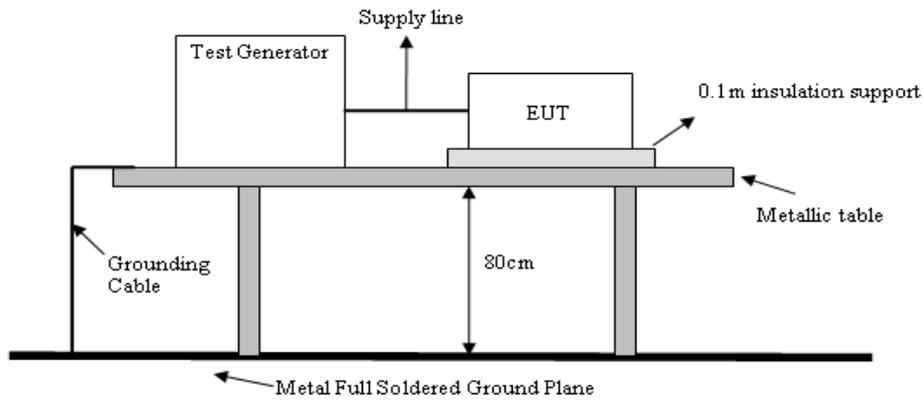

10.1.3 Test Result

Performance of EUT complies with the given specification

10.2 Test Data: Configuration

Basic Standard	EN 61000-4-4		Date				
EUT Model Name	LPC-49xxxx		2021-01-05				
Power	FSP(Model:FSP180-AAAN3)		Engineer				
Barometer Pressure	102.3kPa		SAWYER				
Temperature	25°C		Equipment & Test Site				
Humidity	51%		EM TEST (Model: UCS-500 M6B)				
Voltage/Freq.	230 Vac/50Hz						
A=criteria A, B=criteria B, C=criteria C							
AC Power Port: <input checked="" type="checkbox"/>		DC Power Port: <input type="checkbox"/>		LAN Port: <input checked="" type="checkbox"/> Telephone Port: <input type="checkbox"/>			
AC Power Port							
Line Under Test	Voltage Level	Severity Level	Pulse Polarity	Burst Repetition Rate	Test Duration	EUT Status	Comments
Line	1.0kV	2	+	300ms / 5.0kHz	1 Minutes	A	
Line	1.0kV	2	-	300ms / 5.0kHz	1 Minutes	A	
Neutral	1.0kV	2	+	300ms / 5.0kHz	1 Minutes	A	
Neutral	1.0kV	2	-	300ms / 5.0kHz	1 Minutes	A	
Ground	1.0kV	2	+	300ms / 5.0kHz	1 Minutes	A	
Ground	1.0kV	2	-	300ms / 5.0kHz	1 Minutes	A	
Line- Neutral	1.0kV	2	+	300ms / 5.0kHz	1 Minutes	A	
Line- Neutral	1.0kV	2	-	300ms / 5.0kHz	1 Minutes	A	
Line- Ground	1.0kV	2	+	300ms / 5.0kHz	1 Minutes	A	
Line- Ground	1.0kV	2	-	300ms / 5.0kHz	1 Minutes	A	
Neutral - Ground	1.0kV	2	+	300ms / 5.0kHz	1 Minutes	A	
Neutral - Ground	1.0kV	2	-	300ms / 5.0kHz	1 Minutes	A	
Line-Neutral - Ground	1.0kV	2	+	300ms / 5.0kHz	1 Minutes	A	
Line-Neutral - Ground	1.0kV	2	-	300ms / 5.0kHz	1 Minutes	A	
Signal Port Tested in Capacitive Clamp							
Line Under Test	Voltage Level	Severity Level	Pulse Polarity	Burst Repetition Rate	Test Duration	EUT Status	Comments
Capacitive Clamp	0.5kV	2	+	300ms / 5.0kHz	1 Minutes	A	
Capacitive Clamp	0.5kV	2	-	300ms / 5.0kHz	1 Minutes	A	
Additional Notes: A=criteria A, B=criteria B, C=criteria C							

10.3 Test Setup Photo




11. Surge Immunity

11.1 Test Specification and Setup

11.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-5/ IEC 61000-4-5 (details referred to Sec 1.2)
Test Level:	Line to Line: +/- 0.5 kV, +/- 1 kV Line to Earth: +/- 0.5 kV, +/- 1 kV, +/- 2kV
Rise Time:	1.2us
Hold Time:	50us
Repetition Rate:	30 seconds
Angle:	<input checked="" type="checkbox"/> 0° <input checked="" type="checkbox"/> 90° <input checked="" type="checkbox"/> 180° <input checked="" type="checkbox"/> 270°
Criteria:	B
Test Procedure:	refer to ISL QA -T4-E-S10

11.1.2 Test Setup

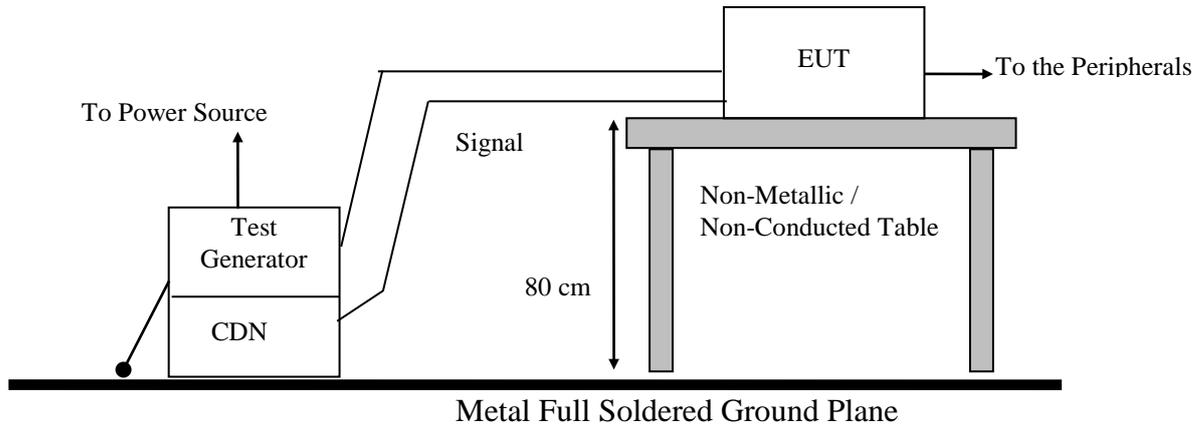

11.1.3 Test Result

Performance of EUT complies with the given specification

11.2 Test Data: Configuration

Basic Standard	EN 61000-4-5		Date					
EUT Model Name	LPC-49xxxx		2021-01-19					
Power	FSP(Model:FSP180-AAAN3)		Engineer					
Barometer Pressure	102.3kPa		SAWYER					
Temperature	21°C		Equipment & Test Site					
Humidity	55%		EM TEST (Model: UCS-500 M6B)					
Voltage/Freq.	230 Vac/50Hz							
A=criteria A, B=criteria B, C=criteria C								
AC Power Port: <input checked="" type="checkbox"/>	DC Power Port: <input type="checkbox"/>	LAN Port: <input type="checkbox"/>	Telephone Port: <input type="checkbox"/>					
AC Power Port								
Line Under Test	Voltage	Level	Polarity	Repetition Rate	Cycle	Pulse Position	EUT Status	Comments
Line-Neutral	0.5kV	2	+	60 sec	5	0, 90, 180, 270	A	
Line-Neutral	0.5kV	2	-	60 sec	5	0, 90, 180, 270	A	
Line-Ground	0.5kV	1	+	60 sec	5	0, 90, 180, 270	A	
Line-Ground	0.5kV	1	-	60 sec	5	0, 90, 180, 270	A	
Neutral- Ground	0.5kV	1	+	60 sec	5	0, 90, 180, 270	A	
Neutral- Ground	0.5kV	1	-	60 sec	5	0, 90, 180, 270	A	
Line- Neutral	1.0kV	3	+	60 sec	5	0, 90, 180, 270	A	
Line- Neutral	1.0kV	3	-	60 sec	5	0, 90, 180, 270	A	
Line-Ground	1.0kV	2	+	60 sec	5	0, 90, 180, 270	A	
Line-Ground	1.0kV	2	-	60 sec	5	0, 90, 180, 270	A	
Neutral- Ground	1.0kV	2	+	60 sec	5	0, 90, 180, 270	A	
Neutral- Ground	1.0kV	2	-	60 sec	5	0, 90, 180, 270	A	
Line-Ground	2.0kv	3	+	60 sec	5	0, 90, 180, 270	A	
Line-Ground	2.0kv	3	-	60 sec	5	0, 90, 180, 270	A	
Neutral- Ground	2.0kv	3	+	60 sec	5	0, 90, 180, 270	A	
Neutral- Ground	2.0kv	3	-	60 sec	5	0, 90, 180, 270	A	
Additional Notes: A=criteria A, B=criteria B, C=criteria C								

11.3 Test Setup Photo




12. Immunity to Conductive Disturbance

12.1 Test Specification and Setup

12.1.1 Test Specification

Port:	AC mains; Twisted Pair LAN Port
Basic Standard:	EN 61000-4-6/ IEC 61000-4-6 (details referred to Sec 1.2)
Test Level:	3 Vrms
Modulation:	AM 1kHz 80%
Frequency range:	0.15 MHz - 80MHz
Frequency Step:	1% of last Frequency
Dwell time:	2s
Criteria:	A
CDN Type:	CDN M2+M3, CDN T4, CDN T8
Test Procedure	refer to ISL QA -T4-E-S11

12.1.2 Test Setup

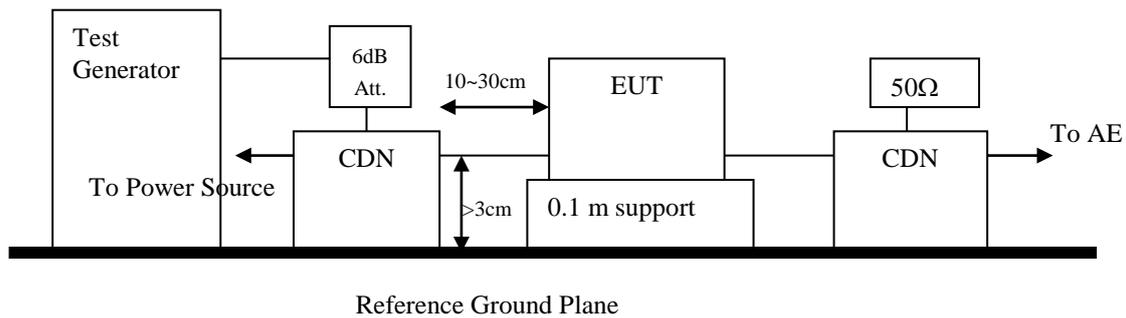

12.1.3 Test Result

Performance of EUT complies with the given specification

12.2 Test Data: Configuration

Basic Standard	EN 61000-4-6		Date				
EUT Model Name	LPC-49xxxx		2021-01-25				
Power	FSP(Model:FSP180-AAAN3)		Engineer				
Barometer Pressure	102.3kPa		SAWYER				
Temperature	25°C		Equipment & Test Site				
Humidity	40%		FRANKONIA (Model: CIT-10/75)				
Voltage/Freq.	230 Vac/50Hz						
A=criteria A, B=criteria B, C=criteria C							
AC Power Port							
Line Under Test	Frequency		Level	Modulation	Dwell time	EUT Status	Comments
	Range (MHz)	Steps %					
AC Power Port	0.15 to 80	1	3V	80% @ 1kHz	2s	A	
Signal & Telecommunication Port							
Line Under Test	Frequency		Level	Modulation	Dwell time	EUT Status	Comments
	Range (MHz)	Steps %					
LAN Port 1	0.15 to 80	2	3V	80% @ 1kHz	2s	A	
LAN Port 2	0.15 to 80	2	3V	80% @ 1kHz	2s	A	
LAN Port 3	0.15 to 80	2	3V	80% @ 1kHz	2s	A	
LAN Port 4	0.15 to 80	2	3V	80% @ 1kHz	2s	A	
Additional Notes: A=criteria A, B=criteria B, C=criteria C							

12.3 Test Setup Photo




13. Power Frequency Magnetic Field immunity

13.1 Test Specification and Setup

13.1.1 Test Specification

Port:	Enclosure
Basic Standard:	EN 61000-4-8/ IEC 61000-4-8 (details referred to Sec 1.2)
Test Level:	1A/m
Polarization:	X, Y, Z
Criteria:	A
Test Procedure	refer to ISL QA -T4-E-S12

13.1.2 Test Setup

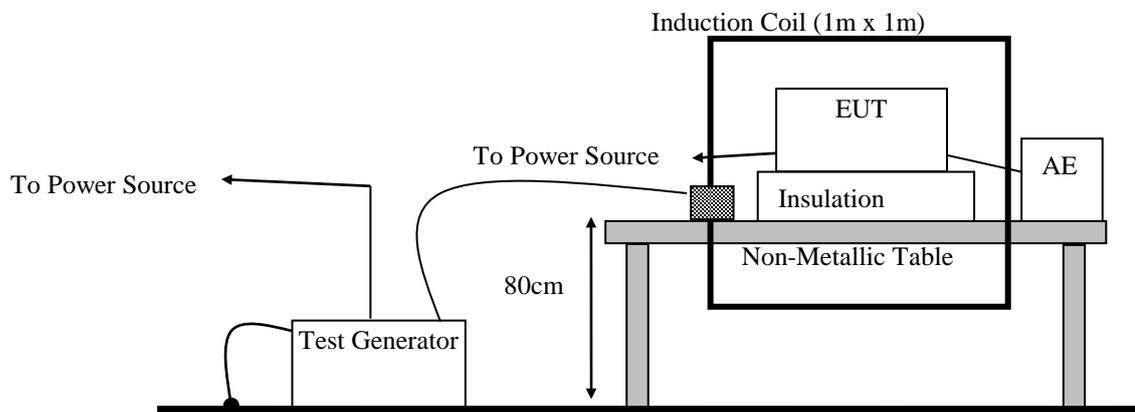


13.1.3 Test Result

Performance of EUT complies with the given specification

13.2 Test Data: Configuration

Basic Standard		EN 61000-4-8			Date	
EUT Model Name		LPC-49xxxx			2021-01-04	
Power		FSP(Model:FSP180-AAAN3)			Engineer	
Barometer Pressure		102.3kPa			SAWYER	
Temperature		21°C			Equipment & Test Site	
Humidity		53%			FCC(F-1000-4-8-G-125A) Immunity Loop: FCC (F-100-4-8-L-1M)	
Voltage/Freq.		230 Vac/50Hz				
A=criteria A, B=criteria B, C=criteria C						
Antenna Polarization	Frequency (Hz)	Test Level	Test Duration	EUT Status	Comment	
X	50	1 A/m	1 Minutes	A		
Y	50	1 A/m	1 Minutes	A		
Z	50	1 A/m	1 Minutes	A		
Additional Notes: A=criteria A, B=criteria B, C=criteria C						

13.3 Test Setup Photo

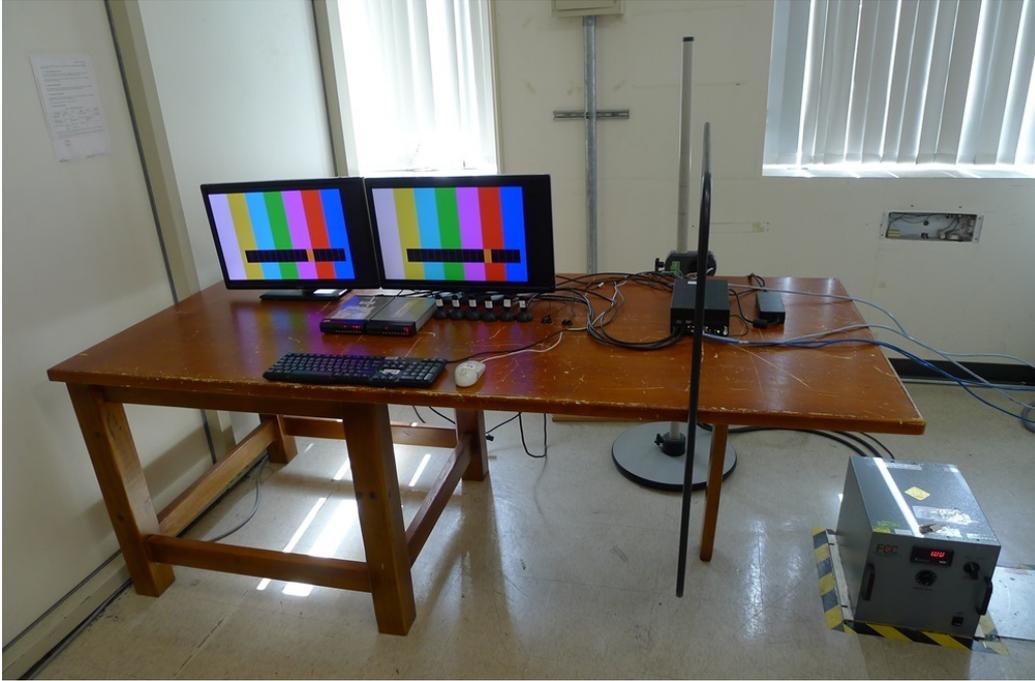


14. Voltage Dips, Short Interruption and Voltage Variation immunity

14.1 Test Specification and Setup

14.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-4-11/ IEC 61000-4-11 (details referred to Sec 1.2)
Test Level: Criteria:	>95% in 0.5 period B
Test Level: Criteria:	30% in 25 period C
Test Level: Criteria:	>95% in 250 period C
Phase:	0°; 180°
Test intervals:	3 times with 10s each
Test Procedure	refer to ISL QA -T4-E-S13

14.1.2 Test Setup

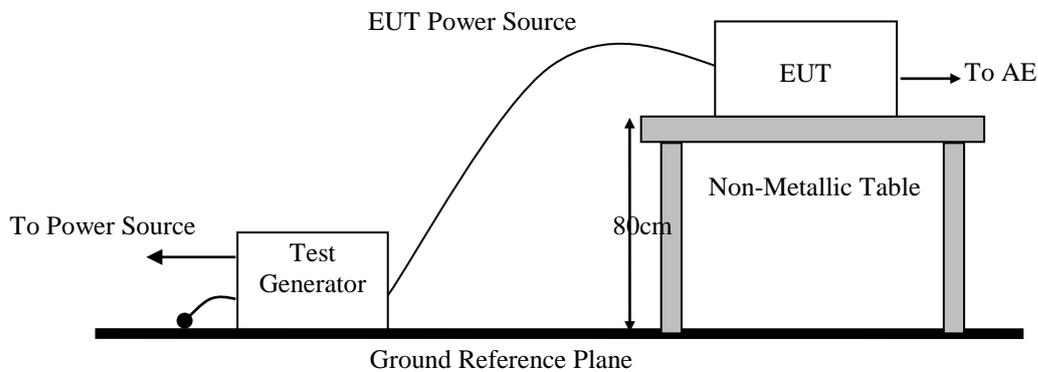

14.1.3 Test Result

Performance of EUT complies with the given specification

14.2 Test Data: Configuration

Basic Standard	EN 61000-4-11	Date				
EUT Model Name	LPC-49xxxx		2021-01-04			
Power	FSP(Model:FSP180-AAAN3)	Engineer				
Barometer Pressure	102.3kPa		SAWYER			
Temperature	22°C	Equipment & Test Site				
Humidity	52%		NOISEKEN (Model:VDS-2002)			
Voltage/Freq.	100Vac/50Hz and 240Vac/50Hz					
A=criteria A, B=criteria B, C=criteria C						
Voltage / Freq.: 240Vac/50Hz						
Voltage Dips Reduction (%)	Duration	Phase	Test Cycle	EUT Status	Comments	
>95%	0.5 period	0°	3	A		
	0.5 period	180°	3	A		
30%	25 period	0°	3	A		
	25 period	180°	3	A		
Voltage Interruptions (%)	Duration	Phase	Test Cycle	EUT Status	Comments	
>95%	250 period	0°	3	C	NOTE	
	250 period	180°	3	C	NOTE	
Voltage / Freq.: 100Vac/50Hz						
Voltage Dips Reduction (%)	Duration	Phase	Test Cycle	EUT Status	Comments	
>95%	0.5 period	0°	3	A		
	0.5 period	180°	3	A		
30%	25 period	0°	3	A		
	25 period	180°	3	A		
Voltage Interruptions (%)	Duration	Phase	Test Cycle	EUT Status	Comments	
>95%	250 period	0°	3	C	NOTE	
	250 period	180°	3	C	NOTE	
Additional Notes: A=criteria A, B=criteria B, C=criteria C						
NOTE: System shutdown.						

14.3 Test Setup Photo



15. Harmonics

15.1 Test Specification and Setup

15.1.1 Test Specification


Port:	AC mains
Active Input Power:	<75W
Basic Standard:	EN 61000-3-2/IEC 61000-3-2 (details referred to Sec 1.2)
Test Duration:	2.5min
Class:	A
Test Procedure	refer to ISL QA -T4-E-S14
Temperature:	20°C
Humidity:	51%

Test Procedure

The EUT is supplied in series with shunts or current transformers from a source having the same nominal voltage and frequency as the rated supply voltage and frequency of the EUT. The EUT is configured to its rated current with additional resistive load when the testing is performed.

Equipment having more than one rated voltage shall be tested at the rated voltage producing the highest harmonics as compared with the limits.

15.1.2 Test Setup

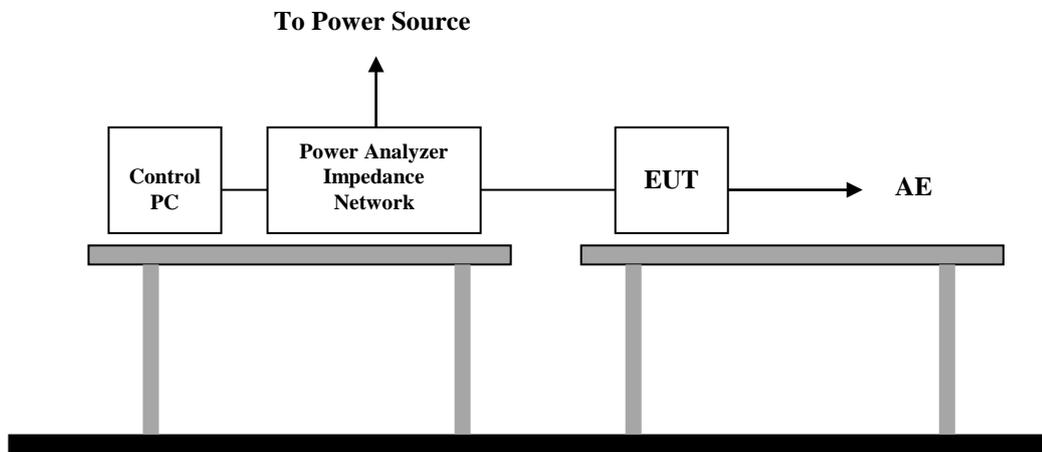

15.1.3 Limit

Limits of Class A Harmonics Currents

Harmonics Order n	Maximum Permissible harmonic current A	Harmonics Order n	Maximum Permissible harmonic current A
Odd harmonics		Even harmonics	
3	2.30	2	1.08
5	1.14	4	0.43
7	0.77	6	0.30
9	0.40	$8 \leq n \leq 40$	$0.23 * 8/n$
11	0.33		
13	0.21		
$15 \leq n \leq 39$	$0.15 * 15/n$		

15.1.4 Test Result

Active input power under 75W, no limit apply, declare compliance

16. Voltage Fluctuations

16.1 Test Specification and Setup


16.1.1 Test Specification

Port:	AC mains
Basic Standard:	EN 61000-3-3/IEC61000-3-3 (details referred to Sec 1.2)
Test Procedure	refer to ISL QA -T4-E-S14
Observation period:	For Pst 10min For Plt 2 hours
Temperature:	20°C
Humidity:	51%

Test Procedure

The EUT is supplied in series with reference impedance from a power source with the voltage and frequency as the nominal supply voltage and frequency of the EUT.

16.1.2 Test Setup

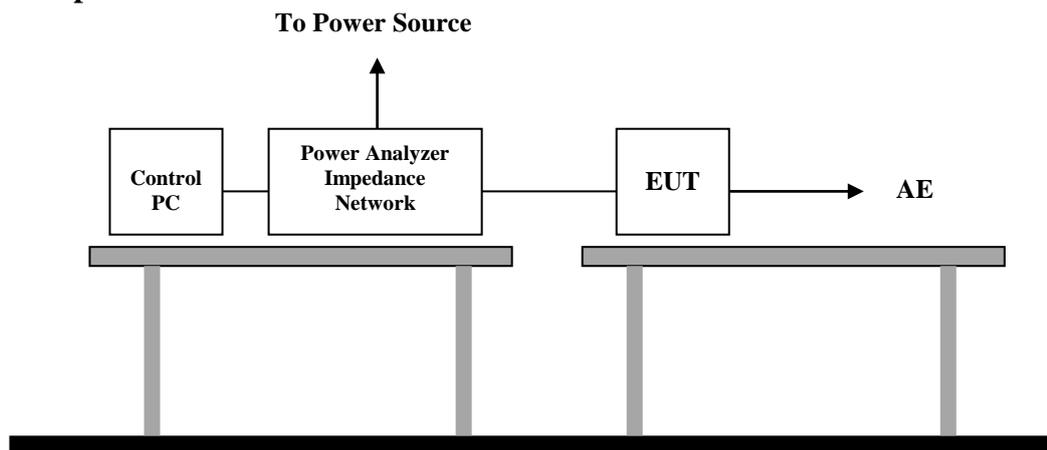

16.1.3 Test Result

Performance of EUT complies with the given specification.

16.2 Test Data: Configuration

Flicker Test Summary per EN/IEC61000-3-3 Ed. 3.0 (2013) (Run time)

Test category: All parameters (European limits)

Test Margin: 100

Test duration (min): 10


Data file name: CTSMXL_F-000093.cts_data

Test Result: Pass


Status: Test Completed

Pst_i and limit line

European Limits

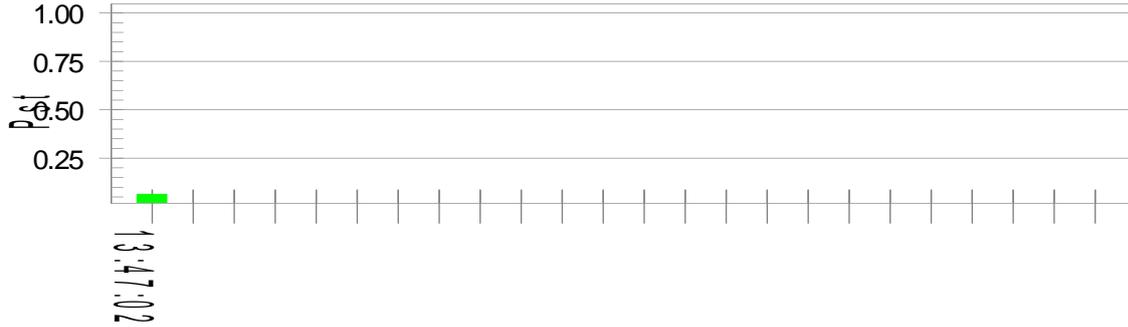

Plt and limit line

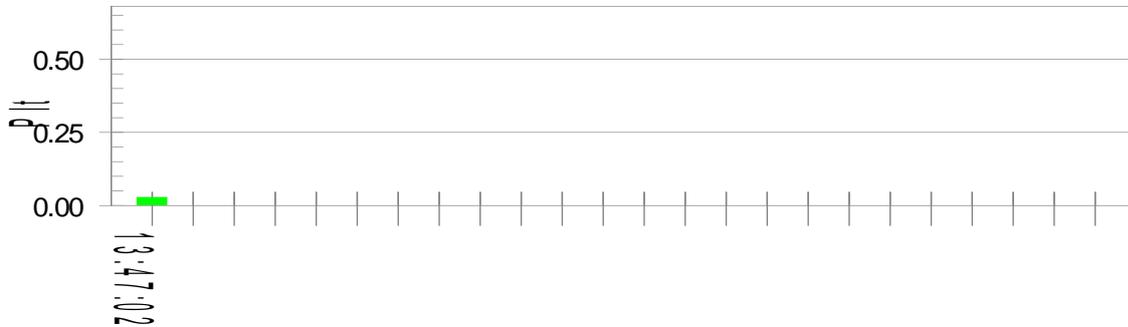

Parameter values recorded during the test:

Vrms at the end of test (Volt):	229.66		
T-max (mS):	0.0	Test limit (mS):	500.0 Pass
Highest dc (%):	0.00	Test limit (%):	3.30 Pass
Highest dmax (%):	0.03	Test limit (%):	4.00 Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000 Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650 Pass

16.3 Test Setup Photo



17. Appendix

17.1 Appendix A: Test Equipment

17.1.1 Test Equipment List

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Conduction 04	LISN 18	ROHDE & SCHWARZ	ENV216	101424	07/01/2020	07/01/2021
Conduction 04	LISN 03	R&S	ESH3-Z5	828874/010	11/05/2020	11/05/2021
Conduction 04	ISN T8 07	Teseq GmbH	ISN T800	30834	09/03/2020	09/03/2021
Conduction 04	Chamber05 -1 Cable	WOKEN	CFD 300-NL	Chamber05 -1 Cable	08/22/2020	08/22/2021
Conduction 04	EMI Receiver 18	ROHDE&SCHWARZ	ESCI	101392	06/03/2020	06/03/2021

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Radiation (Chamber02)	BILOG Antenna 17	Schwarzbeck	Schwarzbeck VULB 9168+EMCI-N-6-05	645	03/09/2020	03/09/2021
Radiation (Chamber02)	Preamplifier 25	EMCI	EMC9135	980295	03/05/2020	03/05/2021
Radiation (Chamber02)	Coaxial Cable Chmb 02-10M-02	EMC	RG214U	Chmb 02-10M-02	10/14/2020	10/14/2021
Radiation (Chamber02)	EMI Receiver 12	ROHDE & SCHWARZ	ESCI	100804	08/19/2020	08/19/2021

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
Rad. Above 1GHz	Spectrum Analyzer 25	R&S	FSV 40	101499	11/04/2020	11/04/2021
Rad. Above 1GHz	Horn Antenna 06	ETS-Lindgren	3117	00066665	11/04/2020	11/04/2021
Rad. Above 1GHz	Preamplifier 20	EMC INSTRUMENT	EMC051845	980084	11/19/2020	11/19/2021
Rad. Above 1GHz	Microwave Cable-11	HUBER SUHNER	SUCOFLEX 106	78034/6	02/03/2020	02/03/2021
Rad. Above 1GHz	Microwave Cable-26	EMCI	EMC104-NM-SM-800	141112	02/26/2020	02/26/2021

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
EN61K-4-2	ESD Gun 9	EM TEST	Dito	V1018106503	04/28/2020	04/28/2021
EN61K-4-3	Broadband Log-Periodic Antenna	AR	AT1080	310698	N/A	N/A
EN61K-4-3	Horn Antenna RF-01	AR	ATS700M11 G	0335864	N/A	N/A
EN61K-4-3	Amplifier 80Mz~1GHz 250W	AR	250W1000A	312494	N/A	N/A
EN61K-4-3	Amplifier 800MHz~4.2GHz 50W	AR	50S1G4M1	312762	N/A	N/A
EN61K-4-3	Amplifier 4.0~8.0GHz 35W	AR	35S4G8AM1	0335752	N/A	N/A
EN61K-4-3	Broadband Coupler 80M~1GHz	Amplifier Research	DC6180A	0341805	N/A	N/A
EN61K-4-3	Coaxial Cable	INSULATED	NPS-4806-23 60-NP3	108599.003.01 .03	N/A	N/A
EN61K-4-3	Broadband Coupler 0.8G~4.26GHz	AR	DC7144A	0335226	N/A	N/A
EN61K-4-3	Broadband Coupler 4G~8GHz	AR	DC7350A	0335817	N/A	N/A
EN61K-4-3	Signal Generator 07	ROHDE& SCHWARZ	SMB100A	107780	11/29/2020	11/29/2021
EN61K-4-4 EN61K-4-5	EFT and SURGE Test System	EM TEST	UCS-500 M6B	V0728102674	03/20/2020	03/20/2021
EN61K-4-4	Capacitive Coupling Clamp	EM TEST	HFK	0907-106	03/20/2020	03/20/2021
EN61K-4-6	CDN M2+M3 04	TESEQ	CDN M016	43257	09/03/2020	09/03/2021
EN61K-4-6	CDN T4 03	FCC Inc.	FCC-801-T4	02068	06/20/2020	06/20/2021
EN61K-4-6	CDN T8-10_1	Teseq GmbH	CDN T8 10	41242	12/27/2020	12/27/2021
EN61K-4-6	Coaxial Cable 4-6 02-1			4-6 02-1	N/A	N/A
EN61K-4-6	Conducted Immunity Test System 03	Frankonia	CIT-10-75	126B1151	01/08/2021	01/08/2022
EN61K-4-8	Magnetic Field Immunity Loop	FCC	F-1000-4-8-L-1M	01037	05/29/2020	05/29/2021
EN61K-4-8	Magnetic Field Test Generator	FCC	F-1000-4-8-G-125A	01038	05/29/2020	05/29/2021
EN61K-4-11	Voltage Dip and UP Simulator 01	NoiseKen	VDS-2002	VDS0640162	09/17/2020	09/17/2021
EN61K-3-2/3, EN61K-3-11-12	(Harmonic/Flicker) MX Series CTSH Compliance Test System	California Instruments	MX60T04GH 10400	72793	08/04/2020	08/04/2021

PS: N/A => The equipment does not need calibration.

****Software for Controlling Spectrum/Receiver and Calculating Test Data**

Test Item	Filename	Version
EN61000-3-2	California Instruments	CTSMXL V2.19.0
EN61000-3-3	California Instruments	CTSMXL V2.19.0
EN61000-4-2	N/A	2.0
EN61000-4-3	i2	529b
EN61000-4-4	EMC TEST	4.10
EN61000-4-5	EMC TEST	4.10
EN61000-4-6	FRANKONIA CD-LAB	V5.221
EN61000-4-8	N/A	
EN61000-4-11	NOISE KEN	2.0

Site	Filename	Version	Issue Date
Conduction/Radiation	EZ EMC	ISL-03A2	3/6/2013

17.2 Appendix B: Uncertainty of Measurement

The laboratory measurement uncertainty accordance with refers to CISPR 16-4-2. If U_{lab} is less than or equal to U_{cispr} in Table 1, then the test report may either state the value of U_{lab} or state that U_{lab} is less than U_{cispr} .

The coverage factor $k = 2$ yields approximately a 95 % level of confidence.

<Conduction 04>

AMN: $\pm 2.90\text{dB}$

ISN T8: $\pm 3.05\text{dB}$

<Chamber 02 (10M)>

Horizontal

30MHz~200MHz: $\pm 4.52\text{dB}$

200MHz~1000MHz: $\pm 4.42\text{dB}$

Vertical

30MHz~200MHz: $\pm 4.51\text{dB}$

200MHz~1000MHz: $\pm 4.70\text{dB}$

<Chamber 14 (3M)>

1GHz~6GHz: $\pm 4.93\text{dB}$

<Immunity 02>

Test item	Uncertainty	Test item	Uncertainty
EN 61000-4-2 (ESD)		EN 61000-4-6 (CS)	
Rise time tr	≤ 9.81%	CDN	± 1.74dB
Peak current Ip	≤ 5.54%	EM Clamp	± 3.36dB
current at 30 ns	≤ 5.55%	EN 61000-4-8 (Magnetic)	± 6.53%
current at 60 ns	≤ 5.55%	EN 61000-4-11 (Dips)	± 2.41%
EN 61000-4-3 (RS)	± 1.89dB	EN 61000-3-2 (Harmonics)	± 1.29 %
EN 61000-4-4 (EFT)		EN 61000-3-3 (Fluctuations and Flicker)	± 6.8 %
voltage rise time (tr)	± 5.1%		
peak voltage value (VP)	± 6.39%		
voltage pulse width (tw)	± 5.0%		
EN 61000-4-5 (Surge)			
open-circuit voltage front time	±13.5%		
open-circuit voltage peak value	±6.6%		
open-circuit voltage duration (Td)	53.33μs		

17.3 Appendix C: Photographs of EUT

Please refer to the File of **ISL-21LE080P-MA**

--- END ---